



Application: residential roads (internal), surrounding office buildings, parks, pedestrians

Ingress protection: IP 66

Material: anodised aluminium alloy

Colour: graphite / inox

Optical system: PMMA optics

Number of LEDs: 32

Operating temperature range: from -40°C to +55°C

Expected useful lifetime: L90F10 – 50 000 h, L80F20 – 100 000 h

CRI: >70 for 5000K, 4000K; >80 for 3500K, 2700K

Corrective factor S/P: 1,8 for 5000K, 4000K; 1,45 for 3500K, 2700K

Input voltage frequency: 50 - 60Hz

Power factor: ≥ 0.95

Inrush electric current: 92A / 250 μ s

Concrete footing / reinforcement basket type: B-50 / Z-50

Luminaire DROP II LED has the possibility to connect to an external control system via DALI interface (optionally via analog signal 1- 10V).






Code	Symbol	Height [H]	LED power	Luminaire power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux ²⁾	Luminous flux ²⁾	Luminous efficacy	Unit volume	Total net weight
215130/1/... ¹⁾	DROP II LED 2 x 24	5m	2x24W	2x28W	500mA	2700K	2x3600lm	2x3400lm	122lm/W	3,01m ³	34,9kg
215130/3/... ¹⁾	DROP II LED 2 x 24	5m	2x24W	2x28W	500mA	3500K	2x3500lm	2x3500lm	125lm/W	3,01m ³	34,9kg
215130/4/... ¹⁾	DROP II LED 2 x 24	5m	2x24W	2x28W	500mA	4000K	2x4200lm	2x4000lm	143lm/W	3,01m ³	34,9kg
215130/6/... ¹⁾	DROP II LED 2 x 24	5m	2x24W	2x28W	500mA	5000K	2x4250lm	2x4050lm	145lm/W	3,01m ³	34,9kg
215132/1/... ¹⁾	DROP II LED 2 x 36	5m	2x36W	2x41W	750mA	2700K	2x5300lm	2x5050lm	124lm/W	3,01m ³	34,9kg
215132/3/... ¹⁾	DROP II LED 2 x 36	5m	2x36W	2x41W	750mA	3500K	2x5500lm	2x5200lm	127lm/W	3,01m ³	34,9kg
215132/4/... ¹⁾	DROP II LED 2 x 36	5m	2x36W	2x41W	750mA	4000K	2x6150lm	2x5850lm	143lm/W	3,01m ³	34,9kg
215132/6/... ¹⁾	DROP II LED 2 x 36	5m	2x36W	2x41W	750mA	5000K	2x6200lm	2x5900lm	144lm/W	3,01m ³	34,9kg
215133/1/... ¹⁾	DROP II LED 2 x 48	5m	2x48W	2x55W	1000mA	2700K	2x6300lm	2x6000lm	110lm/W	3,01m ³	34,9kg
215133/3/... ¹⁾	DROP II LED 2 x 48	5m	2x48W	2x55W	1000mA	3500K	2x6600lm	2x6300lm	115lm/W	3,01m ³	34,9kg
215133/4/... ¹⁾	DROP II LED 2 x 48	5m	2x48W	2x55W	1000mA	4000K	2x7500lm	2x7150lm	130lm/W	3,01m ³	34,9kg
215133/6/... ¹⁾	DROP II LED 2 x 48	5m	2x48W	2x55W	1000mA	5000K	2x7650lm	2x7300lm	133lm/W	3,01m ³	34,9kg

1) Symbol of chosen optical system eg. **215133/6/A** is DROP II LED 2 x 48 5000K with asymmetric optical system

2) tolerance +/- 3% due to LEDs accuracy

Directive: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE, 2009/125/EC

Product can be anodized in 10 colours, with gloss option

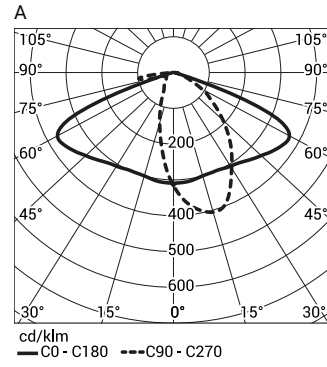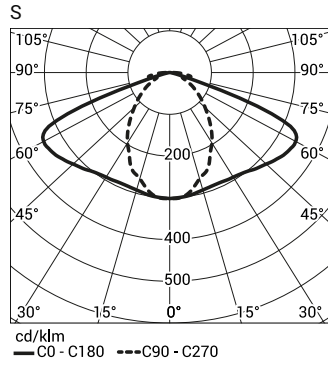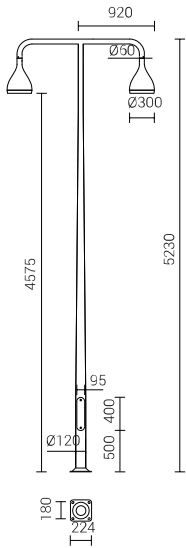

Luminaire DROP II LED in standard has following functions of intelligent power supply:

- Connection to outside control system by DALI interface (operation of analog signal 1-10V as an option),
- Possibility of programming multistage dimming of luminaire, up to 5 intervals in the range of from 10 to 100% of nominal power,
- Temperature protection of LED module (from overheating) in case of unintentional luminaire operation during the,
- Regulation of power / luminous flux – the option of setting another value than the catalogue in the range of 30-100% of nominal one,

Acceptable quantity of luminaires DROP II LED on one circuit, protected by:

Overcurrent switches MCB type B or C

Luminaire	Typ	2A	4A	6A	10A	16A	20A	25A
DROP II LED	B	1	2	4	6	11	13	17
	C	1	4	6	11	18	22	28

Fuse – type gG and GL

Luminaire	2A	4A	6A	10A	16A	20A	25A
DROP II LED	1	4	7	12	20	25	32