





# PROJECT LIGHT

1,5-3h	IP42	ST SELF TESTING	CE		GRL-82x 37m
49m GRL-83x	65m GRL-84x	NI-Cd			


## Mounting method



**Ceiling mounting  
with extension rod 0,25-1m**



## Dimensions

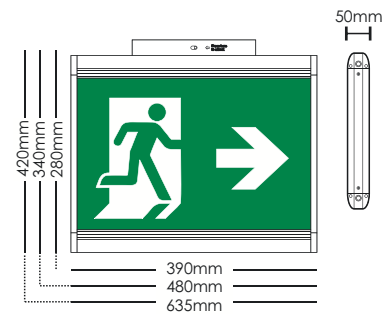

CODE	TYPE	ST	M	NM	☉	🔋	🕒	⚡	🏠 Mains/ Emergency	kg
923822102	GRL-822/EM	✓	✓	✓	IP42	3,6V/1,5Ah Ni-Cd	1,5 h	7,5W/10,1VA	510/255 lm	1628 gr.
923824102	GRL-824/EM	✓	✓	✓	IP42	4,8V/1,5Ah Ni-Cd	3 h	7,5W/10,1VA	510/255 lm	1669 gr.
923832102	GRL-832/EM	✓	✓	✓	IP42	4,8V/1,5Ah Ni-Cd	1,5 h	9,8W/12,3VA	680/340 lm	2327 gr.
923834102	GRL-834/EM	✓	✓	✓	IP42	4,8V/3Ah Ni-Cd	3 h	10,1W/12,7VA	680/340 lm	2427 gr.
923842102	GRL-842/EM	✓	✓	✓	IP42	4,8V/1,5Ah Ni-Cd	1,5 h	11,7W/14,2VA	850/425 lm	2993 gr.
923844102	GRL-844/EM	✓	✓	✓	IP42	4,8V/3Ah Ni-Cd	3 h	12,1W/14,9VA	850/425 lm	3065 gr.

GRL-XXX/EM/O All the above models can be manufactured as single sided luminaries with an aluminum backplate

SINGLE-SIDE PICTOGRAMS			INCLUDED	ON DEMAND	
CODE	TYPE	DESCRIPTION			
813860012	PL-86x/LO	Plexiglass 2mm with left indication for GRL-822/824/860 EM	✓		←
813860011	PL-86x/RO	Plexiglass 2mm with right indication for GRL-822/824/860 EM	✓		→
813860014	PL-86x/DLO	Plexiglass 2mm with down left indication for GRL-822/824/860 EM		—	↓
813860013	PL-86x/DRO	Plexiglass 2mm with down right indication for GRL-822/824/860 EM		—	↘
813860016	PL-86x/ULO	Plexiglass 2mm with up left indication for GRL-822/824/870 EM		—	↑
813860015	PL-86x/URO	Plexiglass 2mm with up right indication for GRL-822/824/860 EM		—	↗
813870010	PL-87x/LO	Plexiglass 2mm with left indication for GRL-832/834/860 EM	✓		←
813870009	PL-87x/RO	Plexiglass 2mm with right indication for GRL-832/834/860 EM	✓		→
813870012	PL-87x/DLO	Plexiglass 2mm with down left indication for GRL-832/834/860 EM		—	↓
813870011	PL-87x/DRO	Plexiglass 2mm with down right indication for GRL-832/834/860 EM		—	↘
813870014	PL-87x/ULO	Plexiglass 2mm with up left indication for GRL-832/834/860 EM		—	↑
813870013	PL-87x/URO	Plexiglass 2mm with up right indication for GRL-832/834/860 EM		—	↗
813880010	PL-88x/LO	Plexiglass 2mm with left indication for GRL-842/844/880 EM	✓		←
813880009	PL-88x/RO	Plexiglass 2mm with right indication for GRL-842/844/880 EM	✓		→
813880012	PL-88x/DLO	Plexiglass 2mm with down left indication for GRL-842/844/880 EM		—	↓
813880011	PL-88x/DRO	Plexiglass 2mm with down right indication for GRL-842/844/880 EM		—	↘
813880014	PL-88x/ULO	Plexiglass 2mm with up left indication for GRL-GRL-842/844/880 EM		—	↑
813880013	PL-88x/URO	Plexiglass 2mm with up right indication for GRL-GRL-842/844/880 EM		—	↗

ACCESSORIES ON DEMAND			kg
CODE	TYPE	DESCRIPTION	
927311300	A-1130	Set of accessories (1m) for ceiling mounting (silver)	375 gr.
927311310	A-1131	Set of accessories (0,5m) for ceiling mounting (silver)	280 gr.
927311320	A-1132	Set of accessories (0,25m) for ceiling mounting (silver)	139 gr.
927311330	A-1133	Accessory for vertical wall mounting (silver)	106,5 gr
927311340	A-1134	Accessory for wall mounting (silver)	111 gr.



A-1130, A-1131, A-1132



A-1133



A-1134

BATTERIES		
CODE	TYPE	DESCRIPTION
601213615	B-972/HT	Battery 3,6V/1,5Ah NiCd
601214815	B-973/HT	Battery 4,8V/1,5Ah Ni-Cd
601214830	B-941/HT	Battery 4,8V/3Ah Ni-Cd