

recessed



ref. ringO 01



General



IP43
EXT



850°C




Ø67



300

LED

w	lum	mA	CRI
6	600	350	>85
10	1.000	700	>85

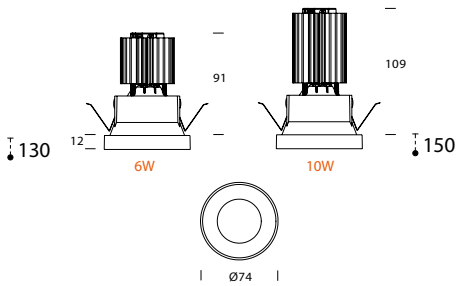

Power



230V

Led

600lm / 6W

RNG1

A

06

.

.

4

.

.

..

1000lm / 10W

RNG1

A

10

.

.

4

.

.

..

Led Control



N

No Dimmable

RNG1

A

..

N

.

.

.

.

..



C

Dimmable IGBT/Triac

RNG1

A

..

C

.

.

.

..



F

Dimmable 1-10 V / Push

RNG1

A

..

F

.

.

.

..



D

Dimmable Dali

RNG1

A

..

D

.

.

.

..

Led Colour Temperature



3

3000° K

RNG1

A

..

.

3

.

.

..



4

4000° K

RNG1

A

..

.

4

.

.

..

Led Beam Angle



4

Medium 40°

RNG1

A

..

.

.

4

.

..

Led Complements



B

Clear Diffuser

RNG1

A

..

.

.

.

B

.



A

Ice Diffuser

RNG1

A

..

.

.

.

A

.



O

Opal Diffuser

RNG1

A

..

.



.

.

O

.

Photometric Data



Colours



WS

Satin White

RNG1

A

..

.

.

.

.

WS



BS

Satin Black

RNG1

A

..

.

.

.

.

BS



WG

Satin White + Gold

RNG1

A

..

.

.

.

.

WG



BG

Satin Black + Gold

RNG1

A

..

.

.

.

.

BG



BW*

Satin Black + Satin White

RNG1

A

..

.

.

.

.

BW*



WA*

Satin White + Blue

RNG1

A

..

.

.

.

.

WA*



BR*

Satin Black + Orange

RNG1

A

..

.

.

.

.

BR*