

recessed



ref. ringO 02



General

	LED		SAVE ENERGY		IP54 EXT		850°C				LED	<table border="1"><thead><tr><th>w</th><th>lum</th><th>mA</th><th>CRI</th></tr></thead><tbody><tr><td>7,8</td><td>1.000</td><td>350</td><td>>85</td></tr><tr><td>16,6</td><td>2.000</td><td>700</td><td>>85</td></tr><tr><td>24,9</td><td>3.000</td><td>700</td><td>>85</td></tr></tbody></table>	w	lum	mA	CRI	7,8	1.000	350	>85	16,6	2.000	700	>85	24,9	3.000	700	>85
w	lum	mA	CRI																									
7,8	1.000	350	>85																									
16,6	2.000	700	>85																									
24,9	3.000	700	>85																									

Power

	LED		230V	Led 1000lm / 7,8W	RNG2	A	10
				Led 2000lm / 16,6W	RNG2	A	20
				Led 3000lm / 24,9W	RNG2	A	30

Led Control

	N	No Dimmable	RNG2	A
	F	Dimmable 1-10 V / Push	RNG2	A
	D	Dimmable Dali	RNG2	A

Led Colour Temperature

	3	3000° K	RNG2	A
	4	4000° K	RNG2	A

Led Beam Angle

	2	Spot 25°	RNG2	A
	3	Medium 36°	RNG2	A
	6	Flood 60°	RNG2	A


Led Complements

	B	Clear Diffuser	RNG2	A	B
	A	Ice Diffuser	RNG2	A	A
	C	Prismatic Diffuser	RNG2	A	C


Colours

	WS	Satin White	RNG2	A	WS
	BS	Satin Black	RNG2	A	BS
	WG	Satin White + Gold	RNG2	A	WG
	BG	Satin Black + Gold	RNG2	A	BG
	BW*	Satin Black + Satin White	RNG2	A	BW*
	WA*	Satin White + Blue	RNG2	A	WA*
	BR*	Satin Black + Orange	RNG2	A	BR*

* Optional, please consult



Photometric Data

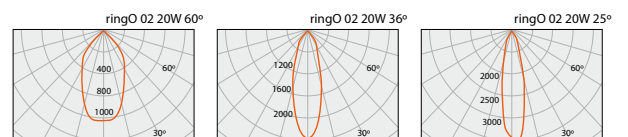

recessed