



Presto LED



A functional LED lighting system made of steel sheet. Possibility to choose one of two lighting beams DI or DI-IN. Thanks to the linear joints (not in the set) the luminaire can be easily connected in line.

Materials: powder painted steel sheet body (standard colour: white), satin parabolic louver PAR-S, internal OPAL diffuser protecting LEDs

Installation: suspended, surface mounted (only DI versions)

Accessories: simple and electric suspensions, invisible linear joints, end caps

Power: 230 V

ELECTRICAL DATA

| | |
|-------------------------|---------------|
| Light source | LED |
| Number of light sources | 1 |
| Type of equipment | AC |
| Voltage rating | 220 ... 240 V |
| Light source included | Yes |

MECHANICAL DATA

| | |
|-----------------------------|-------------|
| Type of installation | Universal |
| Housing material | Steel sheet |
| Designed for light-line | Yes |
| Electrical track connection | No |

INFORMATION

| | |
|-----------------------------|---------------|
| Colour | White |
| Operating temperature range | -15 ... 40 °C |
| Rotated model | No |

CERTIFICATES

| | |
|----------------------------------|------|
| Degree of protection (IP) | IP20 |
| Degree of protection (IP) / top/ | IP20 |
| Class of protection | I |
| CE | Yes |
| EAC | Yes |

LIGHT DATA

| | |
|---|-----------|
| Light colour | White |
| Color rendering index | 84 |
| Light distribution | Wide beam |
| Class of luminaire | I |
| Light output degradation | B10 |
| Lumen maintenance | L80 |
| Lifetime | > 72000 h |
| MacAdam | SDCM 3 |
| Lamp Lumen Maintenance Factor (after 60 000h) | 85 % |

OPTICAL DATA

| | |
|-------------------|-------|
| Louver/ shutter | PAR-S |
| Diffuser colour | White |
| Diffuser material | None |
| Reflector | Mat |


AVAILABE VARIANTS

| Product code | Luminaire power [W] | Luminaire luminous flux [lm] | Luminaire's luminous efficacy [lm/W] | Light distribution | Colour temperature | Weight [kg] |
|--------------|---------------------|------------------------------|--------------------------------------|--------------------|--------------------|-------------|
| PX0759401 | 31 | 3550 | 115 | DI | 3000K | 2.00 |
| PX0759408 | 31 | 3660 | 118 | DI | 4000K | 2.00 |
| PX0759415 | 38 | 4430 | 117 | DI | 3000K | 2.50 |
| PX0759422 | 38 | 4570 | 120 | DI | 4000K | 2.50 |

AVAILABE VARIANTS

| Product code | Luminaire power [W] | Luminaire luminous flux [lm] | Luminaire's luminous efficacy [lm/W] | Light distribution | Colour temperature | Weight [kg] |
|--------------|---------------------|------------------------------|--------------------------------------|--------------------|--------------------|-------------|
| PX0759429 | 46 | 5840 | 127 | DI/IN | 3000K | 2.45 |
| PX0759436 | 46 | 6020 | 131 | DI/IN | 4000K | 2.45 |
| PX0759443 | 60 | 7310 | 122 | DI/IN | 3000K | 3.00 |
| PX0759450 | 60 | 7540 | 126 | DI/IN | 4000K | 3.00 |

DIMENSIONS

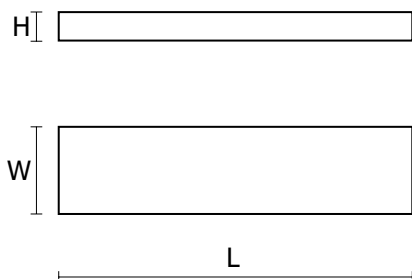

| Product code | L [mm] | W [mm] | H [mm] |
|--------------|--------|--------|--------|
| PX0759401 | 1145 | 125 | 52 |
| PX0759408 | 1145 | 125 | 52 |
| PX0759415 | 1435 | 125 | 52 |
| PX0759422 | 1435 | 125 | 52 |
| PX0759429 | 1145 | 125 | 58 |
| PX0759436 | 1145 | 125 | 58 |
| PX0759443 | 1435 | 125 | 58 |
| PX0759450 | 1435 | 125 | 58 |

L = Length | W = Width | H = Height / Depth

ACCESSORIES

Electric element



Electrical suspension
Pieces in set: 1

PX0922077

Grey

PX0922083

White



Electrical suspension Y
Pieces in set: 1

PX0922062

Grey

PX0922066

White

Structural element

Presto LED End cap
Pieces in set: 1

PX0759485

White

Connecting element

Presto LED Linear joint
Pieces in set: 2

PX0759492

Grey

Installation element



Simple suspension
Pieces in set: 1

PX0922149



Simple suspension Y
Pieces in set: 1

PX0922124
