

SLIM LIGHT




CODE	TYPE	ST	M	NM	IP	Battery	Time	Power	Mains/Emergency	Weight
923378005	GR-8/leds	—	✓	✓	IP42	3,6V/600mAh Ni-Cd	1,5 h	2,7W/3VA	40/100 lm	396 gr.
923009007	GR-9/leds	—	✓	✓	IP42	3,6V/1Ah Ni-Cd	3 h	3W/3,5VA	38/100 lm	410 gr.

The packaging contains 20pcs.


SINGLE-SIDE PICTOGRAMS		DESCRIPTION	INCLUDED	ON DEMAND
CODE	TYPE			
807008106	S-00802/LO	Pictogram Left ISO single side 15m	✓	
807008104	S-00802/RO	Pictogram Right ISO single side 15m	✓	
807008108	S-00802/DO	Pictogram Down ISO single side 15m	✓	
807008110	S-00802/UO	Pictogram Up ISO single side 15m		✓

ACCESSORIES		DESCRIPTION	ON DEMAND	Weight
CODE	TYPE			kg
927300800	A-3008	Base for recessed mounting on suspended ceiling (A-3018 mounting springs are included)	✓	273 gr.
922100800	SP-1008/RLDUB	Marking panel for GR-8 -9 LEDs for all directions (Can be used only when the luminaire is installed on the ceiling)	✓	175 gr.



A-3008

Required opening for suspended wall or ceiling installation




SP-1008/RLDUB

BATTERIES		DESCRIPTION
CODE	TYPE	
601223610	A-931/HT	Battery 3,6V/1000mAh NiCd
601003606	A-926	Battery 3,6V/600mAh Ni-Cd

Mounting methods


Wall mounting




Recessed mounting on a suspended ceiling with the A-3008 base




Recessed ceiling mounting with the A-3008 base and the SP-1008 hanging marking panel

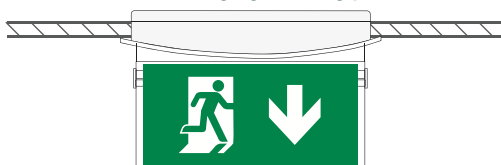

Dimensions

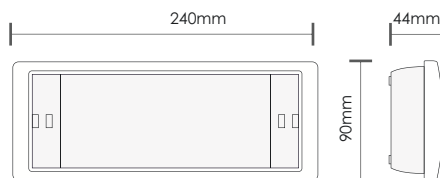

Luminaire with the hanging marking panel



Marking panel



Photometric

