

Traditional poles type S

Outdoor lighting as part of the landscaping gives a unique character of urban space. What matters is aesthetics, quality, durability and economy of operating. A wide range of decorative plastic coated poles and extension-arms allows to choose perfect lighting of urban green spaces, squares and neighborhoods.

Ostróda, Poland





Traditional poles type S



Pole **S-13/B**
luminaire OP,
lamp diffuser
Klio white

Pole **S-21W/B**
luminaire
OS-11 LED

Pole **S-22/B**
luminaire OP,
lamp diffuser
Klio smoke
with cap

Pole **S-23/B**
luminaire
OS-11 LED

Pole **S-30/A**
arm system 2+1 down-
wards luminaires OP,
lamp diffusers Sphere
transparent Ø400, stainless
steel louvre reflectors

Pole **S-31W/A**
arm system 2
upwards,
luminaires
OS-1 LED

Pole **S-32/A**
arm system
2 downwards,
luminaires
OS-11 LED


Pole **S-40W/B**
luminaire
ATLANTIS LED

Pole **S-52W/B**
luminaire
ELBA LED

Pole **S-54 W/A**
arm system 2 down-
wards, luminaires OP,
lamp diffusers Sphere
transparent Ø450,
Stainless steel louvre
reflectors

Pole type	S-13	S-23	S-22	S-21	S-21W	S-30	S-30W	
Height of the pole H [mm]	1400	2655	2090	2055	2055	2765	2765	
Code	Spigot type A	–	12310	12210	12110	12111	13010	13011
	Spigot type B	11320	12320	12220	12120	12121	13020	13021
Net weight [kg]	Spigot type A	–	17	17	17	22	24	26
	Spigot type B	9	15	17	17	22	24	25
Approximate unit volume [m ³]*	Spigot type A	–	0,06	0,08	0,07	0,07	0,1	0,1
	Spigot type B	0,03	0,06	0,08	0,07	0,07	0,1	0,1
Proposed types of luminaires mounted directly on the pole / pole top mounted	Spigot type "B" : ELBA LED, OS-1 LED, OS-11 LED, ATLANTIS LED, ELBA, OS-1, OP, OPA-1							
Bracket configuration	Spigot type "A": "1" "2", "2+1", "3", "3+1" for poles type S-13, S-23, S-54W use maximum bracket configuration "2"							
Concrete footing / reinforcement basket type	B-20/Z-20	B-20/Z-20	B-30/Z-30	B-30/Z-30	B-30/Z-30	B-30/Z-30	B-30/Z-30	
Threaded anchor ending	3 x M12	3 x M12	3 x M14	3 x M14	3 x M14	3 x M14	3 x M14	
Concrete footing / reinforcement basket code	311120 / 311202	311120 / 311202	311130 / 311203	311130 / 311203	311130 / 311203	311130 / 311203	311130 / 311203	
Fasteners	311002	311002	311003	311003	311003	311003	311003	
Dimension of the base plate	ø 225	ø 225	ø 300	ø 300	ø 300	ø 300	ø 300	

* For order of more than 10 pcs stated volume may change according to packing.
W – pole with wiring chamber

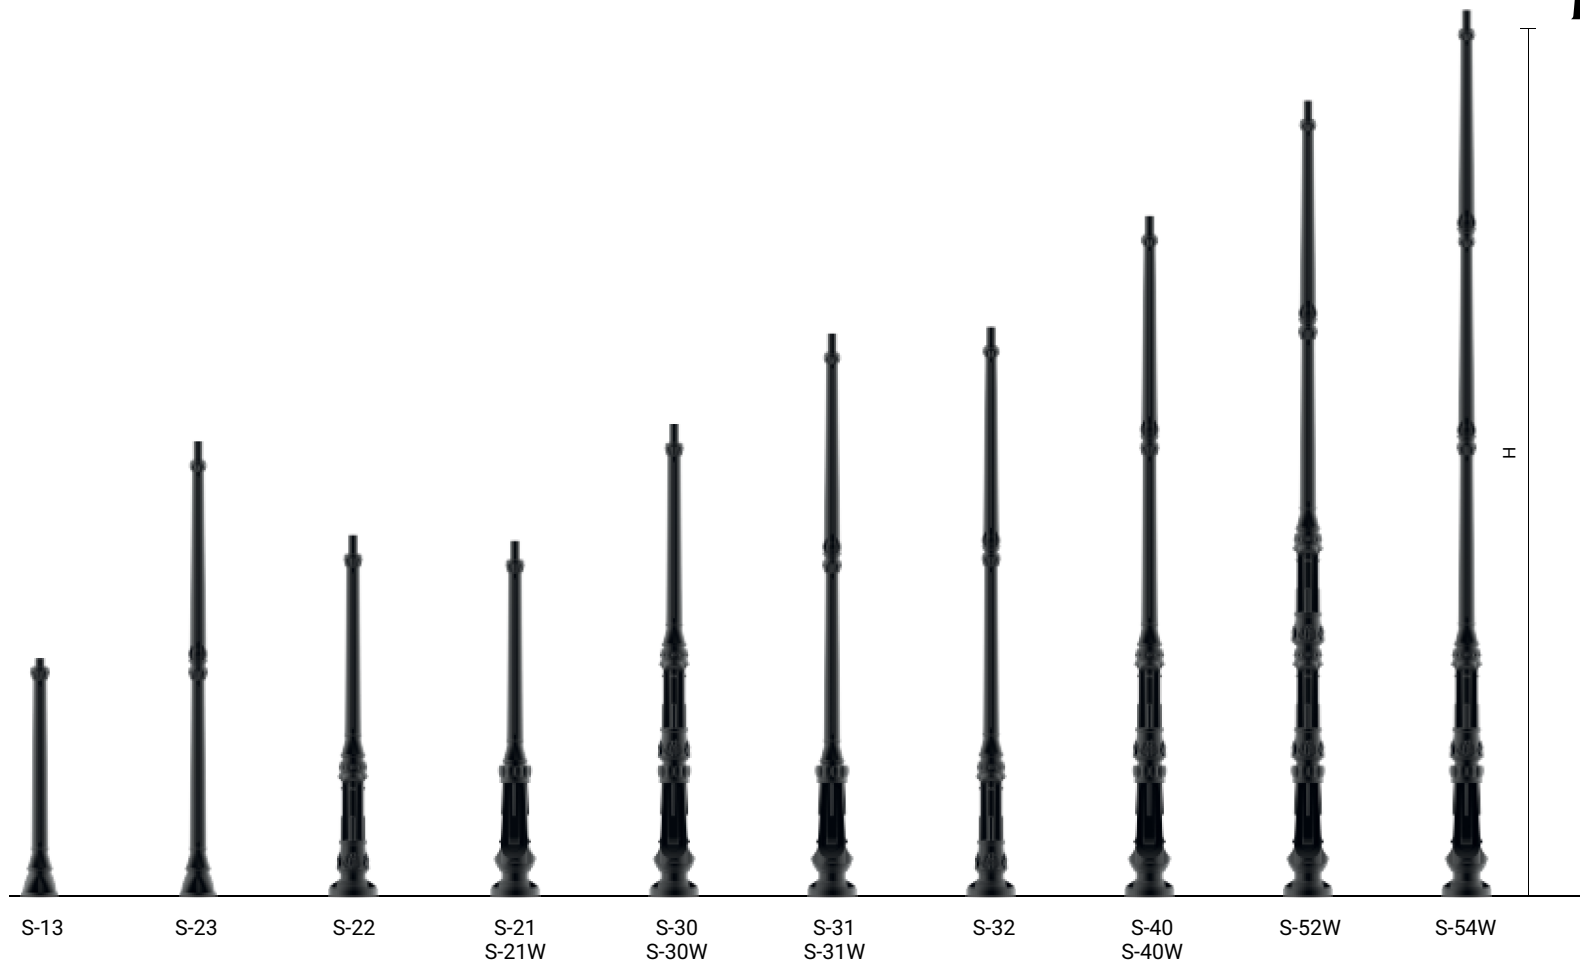

Pole type		S-31	S-31W	S-32	S-40	S-40W	S-52W	S-54W
Height of the pole H [mm]		3320	3320	3355	4030	4030	4735	5285
Code	Spigot type A	13110	13111	13210	14010	14011	15211	15411
	Spigot type B	13120	13121	13220	–	14021	15221	15421
Net weight [kg]	Spigot type A	29	30	28	39	42	49	47
	Spigot type B	29	27	28	–	33	39	41
Approximate unit volume [m ³]*	Spigot type A	0,12	0,12	0,12	0,14	0,14	0,17	0,18
	Spigot type B	0,12	0,12	0,14	–	0,14	0,17	0,18
Proposed types of luminaires mounted directly on the pole / pole top mounted	Spigot type "B" : ELBA LED, OS-1 LED, OS-11 LED, ATLANTIS LED, ELBA, OS-1, OP, OPA-1							
Bracket configuration	Spigot type "A": "1" "2", "2+1", "3", "3+1" for poles type S-13, S-23, S-54W use maximum bracket configuration "2"							
Concrete footing / reinforcement basket type		B-30/Z-30	B-30/Z-30	B-30/Z-30	B-40B/Z-40B	B-40B/Z-40B	B-40/Z-40	B-40/Z-40
Threaded anchor ending		3 x M14	3 x M14	3 x M14	3 x M14	3 x M14	3 x M14	3 x M14
Concrete footing / reinforcement basket code		311130 / 311203	311130 / 311203	311130 / 311203	311140B / 311204B	311140B / 311204B	311140 / 311204	311140 / 311204
Fasteners		311003	311003	311003	311003	311003	311003	311003
Dimension of the base plate		ø 300	ø 300	ø 300	ø 300	ø 300	ø 300	ø 300

* For order of more than 10 pcs stated volume may change according to packing.
W – pole with wiring chamber