



ADRIA P1-5, ADRIA L1-5, ADRIA S1-5

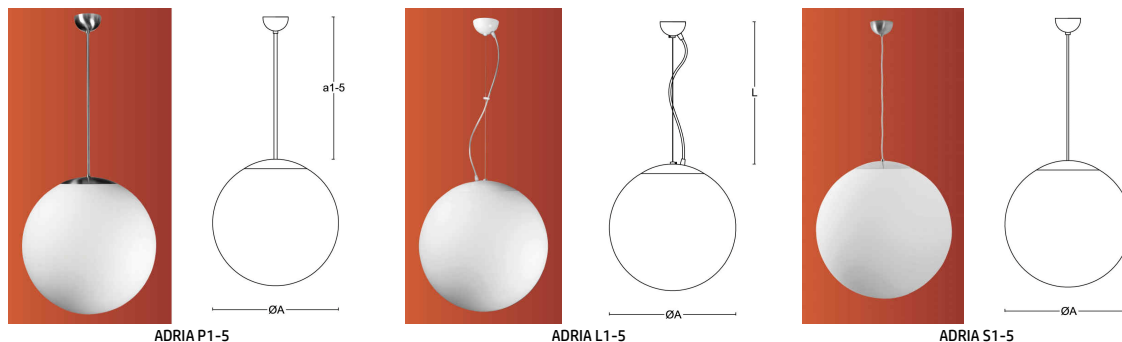

Type	ØA [mm]
ADRIA P1, L1, S1	200
ADRIA P2, L2, S2	300
ADRIA P3, L3, S3	400
ADRIA P4, L4, S4	500
ADRIA P5, L5, S5	600

TECHNICAL DATA

Light source	LED module Osmont L05C, L06C, L07C	incandescent lamp
Chromaticity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Lifetime of LED	50 000 hod / L80B10 (ambient temperature 25°C)	by source
Power source	Tridonic, TCI	-
Photobiological safety of lamps by EN 62471 (Blue light hazard)	safe (Risk group – 0)	by source
Energy class	A++	by source
Input voltage	230V	
IP	IP 40	
Ambient temperature	from -20°C to +30°C	
Warranty	5 years	
Hanger	ADRIA P – pendant, metal or stainless steel with Ø 10mm ADRIA L – wire, steel wire and transparent power cord ADRIA S – cable, transparent or white cable	
Color	white (B), black (C), brass (MS), stainless polished (NL), stainless ground (NB)	
Shade	three layers glass with matt surface	
Shade holder	steel holder with Ø110mm opening (for Ø200,300 mm sizes) steel holder with Ø150mm opening (for Ø400,500,600 mm sizes)	
Mounting	ceiling	
Applications	residential and office spaces	

ADRIA P		ADRIA L		ADRIA S	
Type	Lenght [mm]	Type	Lenght [mm]	Type	Lenght [mm]
a1	200	L100	1000	L100	1000
a2	400	L200	2000		
a3	600				
a4	800				
a5	1000				

VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility DIM (DALI)
			3000K	4000K	3000	4000K	
ADRIA P1	LED-5L05C05Z11/092/a.x.000	9	1070	1130	950	1000	-
ADRIA L1	LED-5L05C05ZL11/092/L...x.000						
ADRIA S1	LED-5L05C05ZS11/092/L100x.000						
ADRIA P2	LED-5L06C04Z11/094/a.x.000	22	2970	3130	2610	2760	•
ADRIA L2	LED-5L06C04ZL11/094/L...x.000						
ADRIA S2	LED-5L06C04ZS11/094/L100x.000						
ADRIA P3	LED-5L06C06Z11/096/a.x.000	29	3900	4110	3430	3620	•
ADRIA L3	LED-5L06C06ZL11/096/L...x.000						
ADRIA S3	LED-5L06C06ZS11/096/L100x.000						
ADRIA P4	LED-5L07C09Z11/098/a.x.000	44	5880	6200	5170	5450	•
ADRIA L4	LED-5L07C09ZL11/098/L...x.000						
ADRIA S4	LED-5L07C09ZS11/098/L100x.000						
ADRIA P5	LED-5L07C10Z11/099/a.x.000	51	6780	7150	5970	6290	•
ADRIA L5	LED-5L07C10ZL11/099/L...x.000						
ADRIA S5	LED-5L07C10ZS11/099/L100x.000						

LED emergency combined:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Luminous flux LED in emergency mode		T [hrs]	Type of battery
			3000K	4000K	3000K	4000K	[%]	[lm]		
ADRIA P3	LED-5L06C06Z111/096/NK1W/a. x.000	29	3900	4110	3430	3620	4	150	1	LiFePO4 3,2V/1,5Ah
ADRIA L3	LED-5L06C06ZL111/096/NK1W/L... x.000									
ADRIA S3	LED-5L06C06ZS111/096/NK1W/L100 x.000									
ADRIA P4	LED-5L07C09Z111/098/NK1W/a. x.000	44	5880	6200	5170	5450	3	150	3	NiCd 3,6V/1,6Ah
ADRIA L4	LED-5L07C09ZL111/098/NK1W/L... x.000									
ADRIA S4	LED-5L07C09ZS111/098/NK1W/L100 x.000									

STANDARD:

	Type	Input [W]	Socket
ADRIA P1	Z11/092/a. x	75	E27
ADRIA L1	ZL11/092/L... x	75	E27
ADRIA S1	ZS11/092/L100 x	75	E27
ADRIA P2	Z11/094/a. x	100	E27
ADRIA L2	ZL11/094/L... x	100	E27
ADRIA S2	ZS11/094/L100 x	100	E27
ADRIA P3	Z11/096/a. x	150	E27
ADRIA L3	ZL11/096/L... x	150	E27
ADRIA S3	ZS11/096/L100 x	150	E27
ADRIA P4	Z11/098/a. x	150	E27
ADRIA L4	ZL11/098/L... x	150	E27
ADRIA S4	ZS11/098/L100 x	150	E27
ADRIA P5	Z11/3/099/a. x	3x60	3xE27
ADRIA L5	ZL11/3/099/L... x	3x60	3xE27
ADRIA S5	ZS11/3/099/L100 x	3x60	3xE27

x - color (B - white, C - black, MS - brass, NL - stainless polished, NB - stainless ground)
.000 - 3000K or 4000K