

# Aliket | 600 mm



Aliket LED 600mm 20w óptica transparente / línea continua  
Aliket LED 600mm 20w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Duris E5  
Includes driver, transparent optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 1 20 1 84 MP	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 1 84 MI	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 1 84 MF	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 1 84 MC	Blanco/White	20W	2100	600x100,80x65,60

Aliket LED 600mm 20w óptica mate / línea continua  
Aliket LED 600mm 20w matt optical / linear lighting

Incluye driver, óptica mate y LED Duris E5  
Includes driver, matt optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 1 20 2 84 MP	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 2 84 MI	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 2 84 MF	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 2 84 MC	Blanco/White	20W	2100	600x100,80x65,60


Aliket LED 600mm 20w óptica asimétrica / línea continua  
Aliket LED 600mm 20w asymmetric optical / linear lighting

Incluye driver, óptica asimétrica y LED Duris E5  
Includes driver, asymmetric optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 1 20 3 84 MP	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 3 84 MI	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 3 84 MF	Blanco/White	20W	2100	600x100,80x65,60
037 01 1 20 3 84 MC	Blanco/White	20W	2100	600x100,80x65,60

Módulo principio (MP), módulo intermedio (MI), módulo final (MF), módulo cerrado (MC)  
Initial module (MP), intermediate module (MI), final module (MF), closed module (MC)

\* Se suministra de manera estándar con LED 4000° K CRI>80.  
\* Standardly supplied with 4000° K LED CRI>80.



Aliket LED 600mm 30w óptica transparente / línea continua  
Aliket LED 600mm 30w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Oslon SSL  
Includes driver, transparent optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 1 30 1 84 MP	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 1 84 MI	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 1 84 MF	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 1 84 MC	Blanco/White	30W	3150	600x100,80x65,60

Aliket LED 600mm 30w óptica mate / línea continua  
Aliket LED 600mm 30w matt optical / linear lighting

Incluye driver, óptica mate y LED Oslon SSL  
Includes driver, matt optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 1 30 2 84 MP	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 2 84 MI	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 2 84 MF	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 2 84 MC	Blanco/White	30W	3150	600x100,80x65,60

Aliket LED 600mm 30w óptica asimétrica / línea continua  
Aliket LED 600mm 30w asymmetric optical / linear lighting

Incluye driver, óptica asimétrica y LED Oslon SSL  
Includes driver, asymmetric optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 1 30 3 84 MP	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 3 84 MI	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 1 84 MF	Blanco/White	30W	3150	600x100,80x65,60
037 01 1 30 1 84 MC	Blanco/White	30W	3150	600x100,80x65,60


Opciones / Options

Ref. DRD Driver regulable Dali / Dimmable driver Dali  
Ref. KE1 Kit de emergencia 1 h. autonomía / Emergency kit 1h. of autonomy  
Ref. KE3 Kit de emergencia 3 h. autonomía / Emergency kit 3 h. of autonomy  
Ref. CRI90 CRI>90

Colores / Colours: Negro/Black [02] - Cromo mate/Matt chrome [52] - Titanio/Titanium [90]  
Disponibile carta de colores RAL bajo pedido / RAL color chart available on request

Opciones / Options LED	Ref. 83	Ref. 84	Ref. 85	Ref. 85
CRI>80 / Temp. de color / Colour temperature	3000°k	4000°k	5000°k	5700°k
20w Duris E5	2090	2100	-	2100
30w Oslon SSL	2730	3150	3150	-

# Aliket | 1200 mm

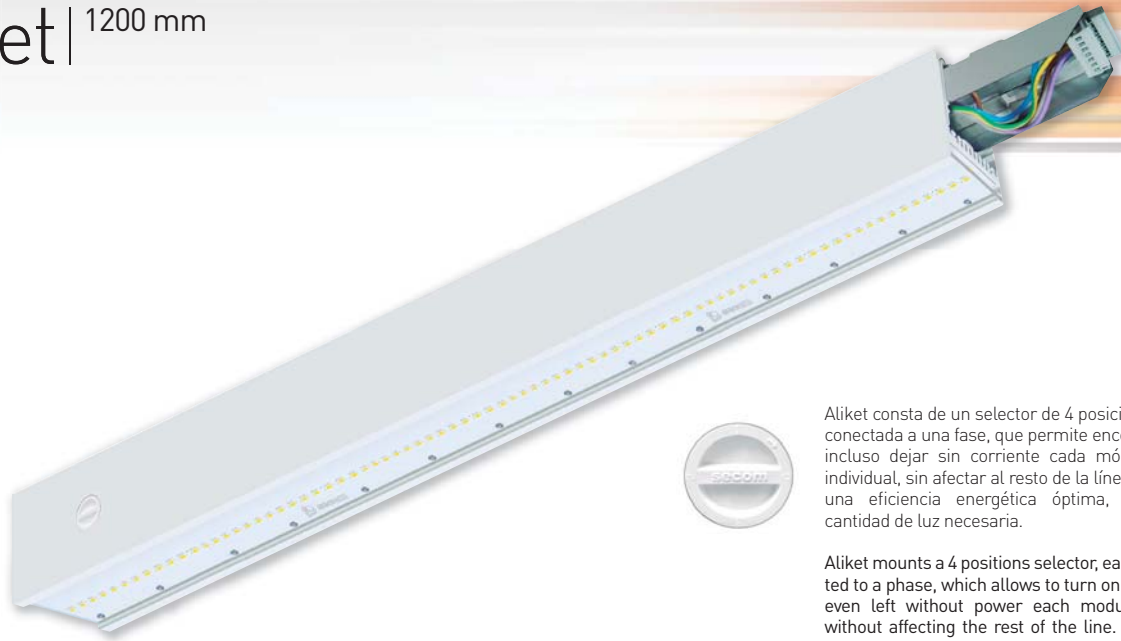

Aliket consta de un selector de 4 posiciones, cada una conectada a una fase, que permite encender, apagar e incluso dejar sin corriente cada módulo de forma individual, sin afectar al resto de la línea. Esto permite una eficiencia energética óptima, adecuando la cantidad de luz necesaria.

Aliket mounts a 4 positions selector, each one connected to a phase, which allows to turn on, to turn off and even left without power each module individually, without affecting the rest of the line. This allows an optimum energy efficiency, adjusting the amount of light needed.



## Aliket LED 1200mm 40w óptica transparente / línea continua Aliket LED 1200mm 40w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Duris E5  
Includes driver, transparent optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 2 40 1 84 MP	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 1 84 MI	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 1 84 MF	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 1 84 MC	Blanco/White	40W	4200	1200x100,80x65,60

## Aliket LED 1200mm 40w óptica mate / línea continua Aliket LED 1200mm 40w matt optical / linear lighting

Incluye driver, óptica mate y LED Duris E5  
Includes driver, matt optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 2 40 2 84 MP	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 2 84 MI	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 2 84 MF	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 2 84 MC	Blanco/White	40W	4200	1200x100,80x65,60

## Aliket LED 1200mm 40w óptica asimétrica / línea continua Aliket LED 1200mm 40w asymmetric optical / linear lighting


Incluye driver, óptica asimétrica y LED Duris E5  
Includes driver, asymmetric optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 2 40 3 84 MP	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 3 84 MI	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 3 84 MF	Blanco/White	40W	4200	1200x100,80x65,60
037 01 2 40 3 84 MC	Blanco/White	40W	4200	1200x100,80x65,60

Módulo principio (MP), módulo intermedio (MI), módulo final (MF), módulo cerrado (MC)  
Initial module (MP), intermediate module (MI), final module (MF), closed module (MC)

\* Se suministra de manera estándar con LED 4000° K CRI>80.

\* Standardly supplied with 4000° K LED CRI>80.



## Aliket LED 1200mm 60w óptica transparente / línea continua Aliket LED 1200mm 60w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Oslon SSL  
Includes driver, transparent optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 2 60 1 84 MP	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 1 84 MI	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 1 84 MF	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 1 84 MC	Blanco/White	60W	6300	1200x100,80x65,60

## Aliket LED 1200mm 60w óptica mate / línea continua Aliket LED 1200mm 60w matt optical / linear lighting

Incluye driver, óptica mate y LED Oslon SSL  
Includes driver, matt optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 2 60 2 84 MP	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 2 84 MI	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 2 84 MF	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 2 84 MC	Blanco/White	60W	6300	1200x100,80x65,60

## Aliket LED 1200mm 60w óptica asimétrica / línea continua Aliket LED 1200mm 60w asymmetric optical / linear lighting

Incluye driver, óptica asimétrica y LED Oslon SSL  
Includes driver, asymmetric optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 2 60 3 84 MP	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 3 84 MI	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 3 84 MF	Blanco/White	60W	6300	1200x100,80x65,60
037 01 2 60 3 84 MC	Blanco/White	60W	6300	1200x100,80x65,60

### Opciones / Options

Ref. DRD Driver regulable Dali / Dimmable driver Dali

Ref. KE1 Kit de emergencia 1 h. autonomía / Emergency kit 1h. of autonomy

Ref. KE3 Kit de emergencia 3 h. autonomía / Emergency kit 3 h. of autonomy

Ref. CRI90 CRI>90

Colores / Colours: Negro/Black (02) - Cromo mate/Matt chrome (52) - Titio/Titanium (90)  
Disponibile carta de colores RAL bajo pedido / RAL color chart available on request

### Opciones / Options LED

Ref. >80 / Temp. de color / Colour temperature	Ref. 83 3000°k	Ref. 84 4000°k	Ref. 85 5000°k	Ref. 85 5700°k
40w Duris E5	4180	4200	-	4200
60w Oslon SSL	5460	6300	6300	-

# Aliket | 1500 mm



## Aliket LED 1500mm 50w óptica transparente / línea continua Aliket LED 1500mm 50w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Duris E5  
Includes driver, transparent optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 4 50 1 84 MP	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 1 84 MI	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 1 84 MF	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 1 84 MC	Blanco/White	50W	5512	1500x100,80x65,60

## Aliket LED 1500mm 50w óptica mate / línea continua Aliket LED 1500mm 50w matt optical / linear lighting

Incluye driver, óptica mate y LED Duris E5  
Includes driver, matt optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 4 50 2 84 MP	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 2 84 MI	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 2 84 MF	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 2 84 MC	Blanco/White	50W	5512	1500x100,80x65,60

## Aliket LED 1500mm 50w óptica asimétrica / línea continua Aliket LED 1500mm 50w asymmetric optical / linear lighting


Incluye driver, óptica asimétrica y LED Duris E5  
Includes driver, asymmetric optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 4 50 3 84 MP	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 3 84 MI	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 3 84 MF	Blanco/White	50W	5512	1500x100,80x65,60
037 01 4 50 3 84 MC	Blanco/White	50W	5512	1500x100,80x65,60

Módulo principio (MP), módulo intermedio (MI), módulo final (MF), módulo cerrado (MC)  
Initial module (MP), intermediate module (MI), final module (MF), closed module (MC)

\* Se suministra de manera estándar con LED 4000° K CRI>80.

\* Standardly supplied with 4000° K LED CRI>80.



## Aliket LED 1500mm 75w óptica transparente / línea continua Aliket LED 1500mm 75w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Oslon SSL  
Includes driver, transparent optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 4 75 1 84 MP	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 1 84 MI	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 1 84 MF	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 1 84 MC	Blanco/White	75W	7386	1500x100,80x65,60

## Aliket LED 1500mm 75w óptica mate / línea continua Aliket LED 1500mm 75w matt optical / linear lighting

Incluye driver, óptica mate y LED Oslon SSL  
Includes driver, matt optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 4 75 2 84 MP	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 2 84 MI	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 2 84 MF	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 2 84 MC	Blanco/White	75W	7386	1500x100,80x65,60

## Aliket LED 1500mm 75w óptica asimétrica / línea continua Aliket LED 1500mm 75w asymmetric optical / linear lighting

Incluye driver, óptica asimétrica y LED Oslon SSL  
Includes driver, asymmetric optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 4 75 3 84 MP	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 3 84 MI	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 3 84 MF	Blanco/White	75W	7386	1500x100,80x65,60
037 01 4 75 3 84 MC	Blanco/White	75W	7386	1500x100,80x65,60

### Opciones / Options

Ref. DRD Driver regulable Dali / Dimmable driver Dali

Ref. KE1 Kit de emergencia 1 h. autonomía / Emergency kit 1h. of autonomy

Ref. KE3 Kit de emergencia 3 h. autonomía / Emergency kit 3 h. of autonomy

Ref. CRI90 CRI>90


Colores / Colours: Negro/Black (02) - Cromo mate/Matt chrome (52) - Titano/Titanium (90)

Disponible carta de colores RAL bajo pedido / RAL color chart available on request

### Opciones / Options LED

CRI>80 / Temp. de color / Colour temperature	Ref. 83 3000°k	Ref. 84 4000°k	Ref. 85 5000°k	Ref. 85 5700°k
50w Duris E5	5486	5512	-	5512
75w Oslon SSL	7140	7386	7386	-

# Aliket | 2400 mm

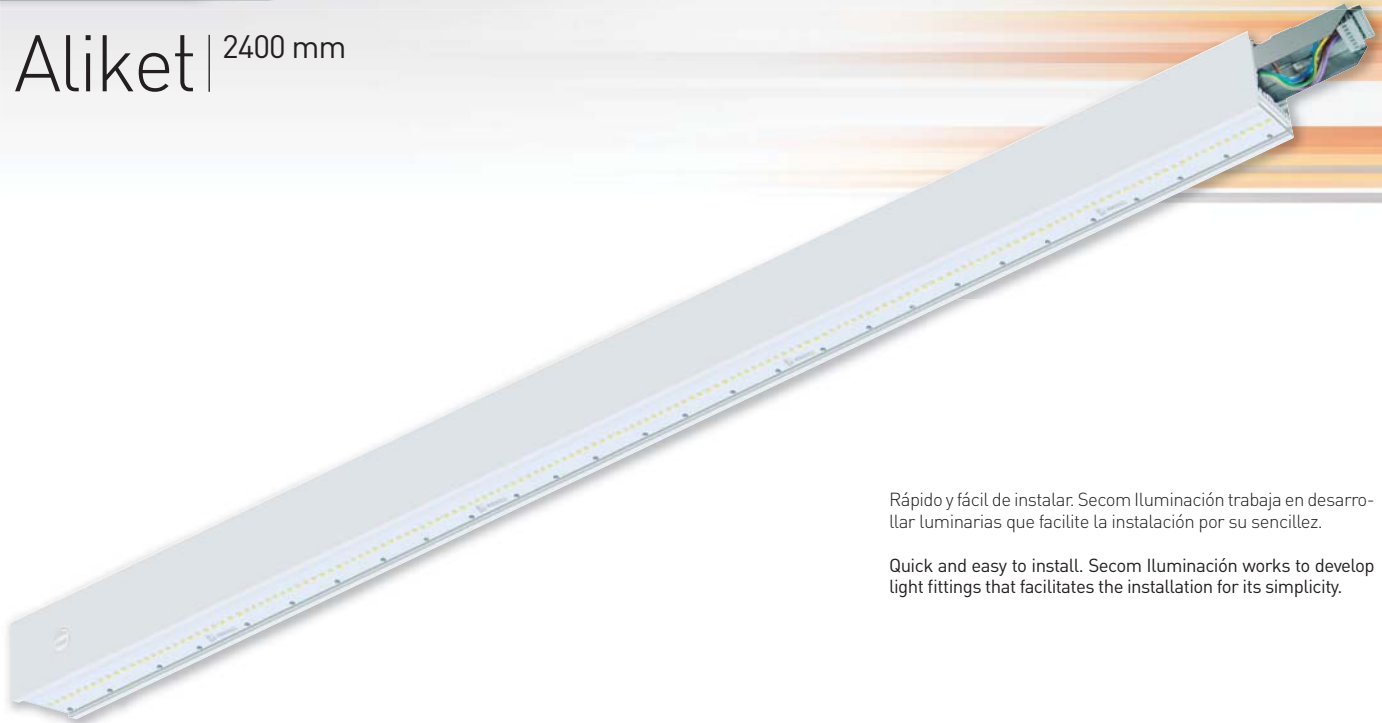

Rápido y fácil de instalar. Secom Iluminación trabaja en desarrollar luminarias que facilite la instalación por su sencillez.

Quick and easy to install. Secom Iluminación works to develop light fittings that facilitates the installation for its simplicity.



## Aliket LED 2400mm 80w óptica transparente / línea continua Aliket LED 2400mm 80w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Duris E5  
Includes driver, transparent optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 3 80 1 84 MP	Blanco/White	80W	8400	2400x100,80x65,60
037 01 3 80 1 84 MI	Blanco/White	80W	8400	2400x100,80x65,60
037 01 3 80 1 84 MF	Blanco/White	80W	8400	2400x100,80x65,60
037 01 3 80 1 84 MC	Blanco/White	80W	8400	2400x100,80x65,60

## Aliket LED 2400mm 80w óptica mate / línea continua Aliket LED 2400mm 80w matt optical / linear lighting

Incluye driver, óptica mate y LED Duris E5  
Includes driver, matt optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 3 80 2 84 MP	Blanco/White	80W	8400	2400x100,80x65,60
037 01 3 80 2 84 MI	Blanco/White	80W	8400	2400x100,80x65,60
037 01 3 80 2 84 MF	Blanco/White	80W	8400	2400x100,80x65,60
037 01 3 80 2 84 MC	Blanco/White	80W	8400	2400x100,80x65,60


## Aliket LED 2400mm 80w óptica asimétrica / línea continua Aliket LED 2400mm 80w asymmetric optical / linear lighting

Incluye driver, óptica asimétrica y LED Duris E5  
Includes driver, asymmetric optical and LED Duris E5

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 3 80 3 84 MP	Blanco/White	80W	8400	2400x100,80x65,60
037 01 3 80 3 84 MI	Blanco/White	80W	8400	2400x100,80x65,60
037 01 3 80 3 84 MF	Blanco/White	80W	8400	2400x100,80x65,60
037 01 3 80 3 84 MC	Blanco/White	80W	8400	2400x100,80x65,60

Módulo principio (MP), módulo intermedio (MI), módulo final (MF), módulo cerrado (MC)  
Initial module (MP), intermediate module (MI), final module (MF), closed module (MC)

\* Se suministra de manera estándar con LED 4000° K CRI>80.  
\* Standardly supplied with 4000° K LED CRI>80.

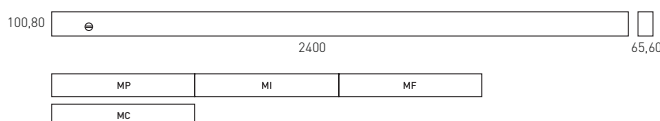

## Aliket LED 2400mm 120w óptica transparente / línea continua Aliket LED 2400mm 120w transparent optical / linear lighting

Incluye driver, óptica transparente y LED Oslon SSL  
Includes driver, transparent optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 3 12 1 84 MP	Blanco/White	120W	12600	2400x100,80x65,60
037 01 3 12 1 84 MI	Blanco/White	120W	12600	2400x100,80x65,60
037 01 3 12 1 84 MF	Blanco/White	120W	12600	2400x100,80x65,60
037 01 3 12 1 84 MC	Blanco/White	120W	12600	2400x100,80x65,60

## Aliket LED 2400mm 120w óptica mate / línea continua Aliket LED 2400mm 120w matt optical / linear lighting

Incluye driver, óptica mate y LED Oslon SSL  
Includes driver, matt optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 3 12 2 84 MP	Blanco/White	120W	12600	2400x100,80x65,60
037 01 3 12 2 84 MI	Blanco/White	120W	12600	2400x100,80x65,60
037 01 3 12 2 84 MF	Blanco/White	120W	12600	2400x100,80x65,60
037 01 3 12 2 84 MC	Blanco/White	120W	12600	2400x100,80x65,60

## Aliket LED 2400mm 120w óptica asimétrica / línea continua Aliket LED 2400mm 120w asymmetric optical / linear lighting

Incluye driver, óptica asimétrica y LED Oslon SSL  
Includes driver, asymmetric optical and LED Oslon SSL

Ref.	Color/Colour	W	Lum.	Med./Measu.
037 01 3 12 3 84 MP	Blanco/White	120W	12600	2400x100,80x65,60
037 01 3 12 3 84 MI	Blanco/White	120W	12600	2400x100,80x65,60
037 01 3 12 3 84 MF	Blanco/White	120W	12600	2400x100,80x65,60
037 01 3 12 3 84 MC	Blanco/White	120W	12600	2400x100,80x65,60

### Opciones / Options

Ref. DRD Driver regulable Dali / Dimmable driver Dali  
Ref. KE1 Kit de emergencia 1 h. autonomía / Emergency kit 1h. of autonomy  
Ref. KE3 Kit de emergencia 3 h. autonomía / Emergency kit 3 h. of autonomy  
Ref. CRI90 CRI>90

Colores / Colours: Negro / Black (02) - Cromo mate / Matt chrome (52) - Titanio / Titanium (90)  
Disponible carta de colores RAL bajo pedido / RAL color chart available on request

Opciones / Options LED	Ref. 83	Ref. 84	Ref. 85	Ref. 85
CRI>80 / Temp. de color / Colour temperature	3000°k	4000°k	5000°k	5700°k
80w Duris E5	8360	8400	-	8400
120w Oslon SSL	10920	12600	12600	-



# Aliket | accesorios / accessories

## Suspensión / Suspension

Kit suspensión regulable, con regulación de altura  
Adjustable suspension kit, with height adjustment

Ref.	Aliket	Long. cable Cable length	Unds. por luminaria Units per luminaire
S6001	600mm	1200 mm	2
S6002	600mm	2000 mm	2
S6003	600mm	3000 mm	2
S1201	1200mm	1200 mm	3
S1202	1200mm	2000 mm	3
S1203	1200mm	3000 mm	3
S1501	1500mm	1200 mm	3
S1502	1500mm	2000 mm	3
S1503	1500mm	3000 mm	3
S2401	2400mm	1200 mm	4
S2402	2400mm	2000 mm	4
S2403	2400mm	3000 mm	4




\* Suspensión disponible en otras longitudes (bajo pedido)  
\* Suspension available in other lengths (on request)



## Pinza para superficie / Clamp surface

Pinza para superficie Aliket  
Clamp surface Aliket

Ref.	Aliket	Unds. por luminaria Units per luminaire
0167 600	600mm	2
0167 120	1200mm	3
0167 150	1500mm	3
0167 240	2400mm	4

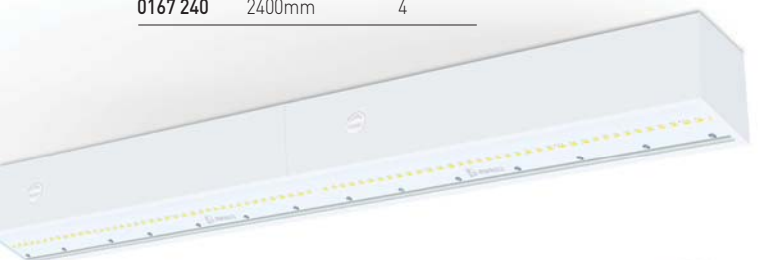

## Codo 90° / 90° joint

Aliket LED codo 90° óptica transparente / línea continua  
Aliket LED codo 90° transparent optical / linear lighting

Incluye driver, óptica transparente y LED  
Includes driver, transparent optical and LED

Ref.	Color/Colour	W	Lum.	Med./Measu.
0060 01 40 1 84	Blanco/White	40W	4200	665,6x665,6
0060 01 60 1 84	Blanco/White	60W	6300	665,6x665,6

Aliket LED codo 90° óptica mate / línea continua  
Aliket LED codo 90° matt optical / linear lighting

Incluye driver, óptica mate y LED  
Includes driver, matt optical and LED

Ref.	Color/Colour	W	Lum.	Med./Measu.
0060 01 40 2 84	Blanco/White	40W	4200	665,6x665,6
0060 01 60 2 84	Blanco/White	60W	6300	665,6x665,6

Aliket LED codo 90° óptica asimétrica / línea continua  
Aliket LED codo 90° asymmetric optical / linear lighting

Incluye driver, óptica asimétrica y LED  
Includes driver, asymmetric optical and LED

Ref.	Color/Colour	W	Lum.	Med./Measu.
0060 01 40 3 84	Blanco/White	40W	4200	665,6x665,6
0060 01 60 3 84	Blanco/White	60W	6300	665,6x665,6

### Opciones / Options

Ref. **DRD** Driver regulable Dali / Dimmable driver Dali  
Ref. **KE1** Kit de emergencia 1 h. autonomía / Emergency kit 1h. of autonomy  
Ref. **KE3** Kit de emergencia 3 h. autonomía / Emergency kit 3 h. of autonomy  
Ref. **CRI90** CRI>90

Colores/Colours: Negro/Black [02] - Cromo mate/Matt chrome [52] - Titanio/Titanium [90]  
Disponible carta de colores RAL bajo pedido / Disponible carta de colores RAL bajo pedido

Opciones / Options LED	Ref. 83	Ref. 84	Ref. 85	Ref. 85
<b>CRI&gt;80</b> / Temp. de color / Colour temperature	3000°k	4000°k	5000°k	5700°k
<b>40w Duris E5</b>	4180	4200	-	4200
<b>60w Oslon SSL</b>	5460	6300	6300	-



## Tramo ciego / Stretch blind

Aliket tramo ciego  
Aliket stretch blind

Ref.	Aliket	Tramo ciego Stretch blind	Ref.	Aliket	Tramo ciego Stretch blind
0060	600mm	MP	0150	1500mm	MP
0061	600mm	MI	0151	1500mm	MI
0062	600mm	MF	0152	1500mm	MF
0120	1200mm	MP	0240	2400mm	MP
0121	1200mm	MI	0241	2400mm	MI
0122	1200mm	MF	0242	2400mm	MF

Módulo principio (MP), módulo intermedio (MI), módulo final (MF), módulo cerrado (MC)  
Initial module (MP), intermediate module (MI), final module (MF), closed module (MC)

# Aliket | instalación / installation

## fácil instalación


Aliket, gracias a su innovador diseño hace que la unión de los módulos sea más fácil y sencillo, simplemente introduciendo el conector a la siguiente luminaria, así sucesivamente hasta completarla línea continua.

Hasta 55 metros en una línea de luminarias con un solo punto de alimentación.

## easy installation

Aliket, thanks to its innovative design, it makes the join of the modules easier and more simple, simply introducing the connector to the next luminaire, and so on, until the continuous line is completed.

Up to 55 meters in a line of luminaires with a single point of supply.

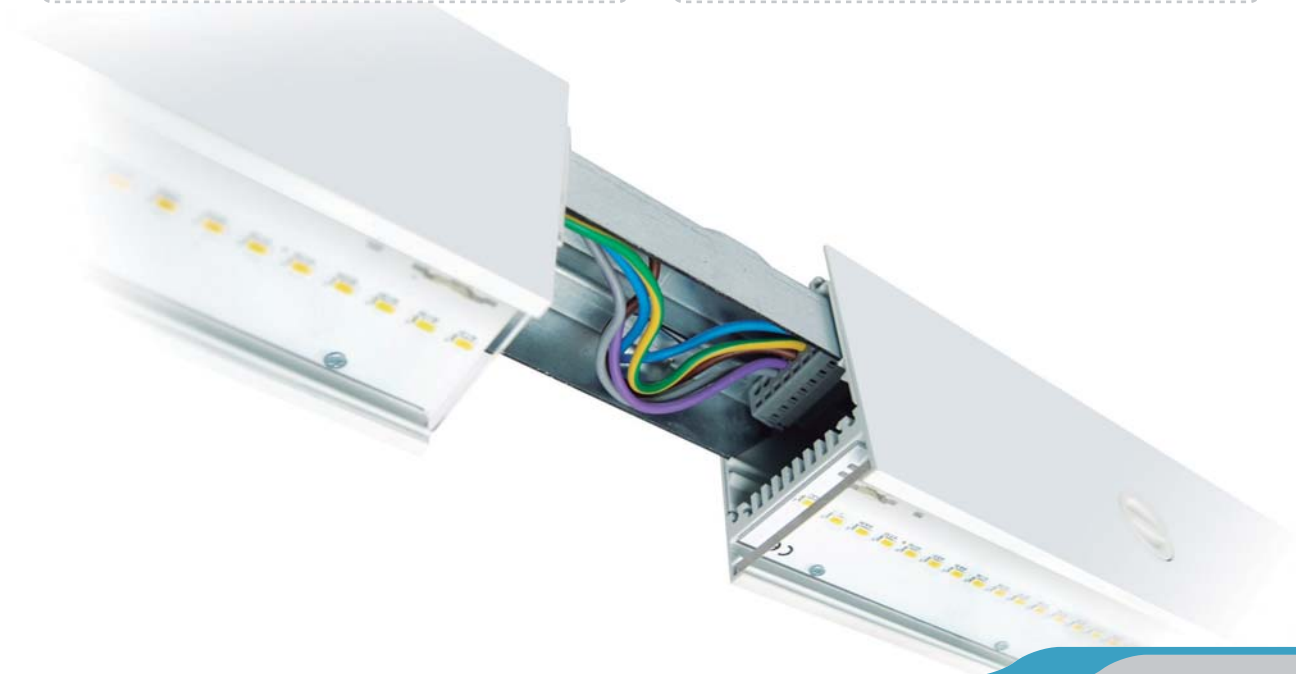

instalación Aliket suspensión  
installation suspension ALiket



unión de módulos  
module joining



instalación kit suspensión  
installation suspension kit



acoplar pinzas  
coupling clamps



selección de fase  
phase selector



instalación Aliket superficie  
installation surface ALiket



instalación pinzas  
installation clamps



anclaje de módulos  
anchoring modules



unión de módulos  
module joining






selección de fase  
phase selector



# Aliket | curvas fotométricas / photometric curves



Duris E5 120°

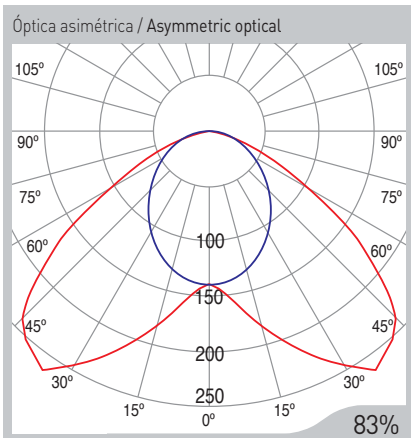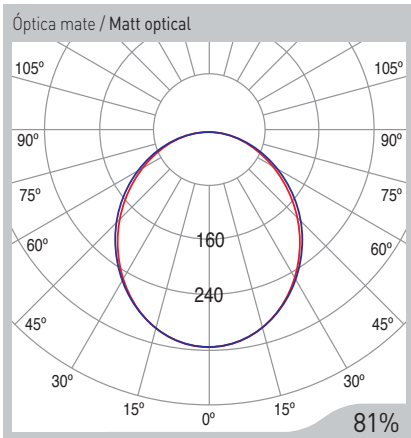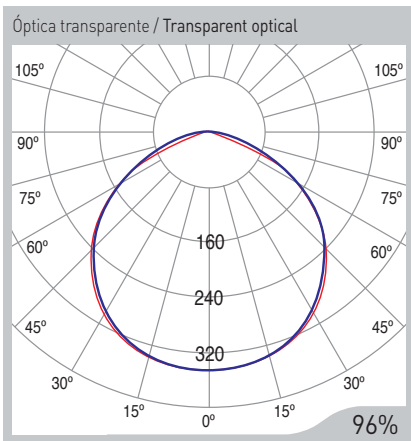

Oslon SSL 80°

