


AURIGA C LED

Downlights



Description:	Recessed mounted LED downlight Light distribution type: direct Optical system: clear glass diffuser, faceted aluminium reflector, 40°, UGR≤19/ opal PMMA diffuser/ translucent micro-prismatic PMMA diffuser Housing: aluminium Colour: white (RAL9016)
General data:	Mains voltage: 220-240V, 0/50-60Hz LED lifetime, h: 75000/L80B50 SDCM: 3 Protection class IEC: II Ingress protection code: IP44 Mechanical impact resistance: IK04 Operating temperature range, °C: ta 0...+35
Installation:	In ceilings with cut-out openings (mounting brackets included). Push-in terminal, 2x1x1.5mm2
Environment:	Indoor
Application:	Office, education, hotel, corridor, bathroom, retail, showroom, exhibition, public place

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI	CCT*, K	Weight, kg
Auriga C LED1x1800 D336 T830 CLR	195	195	140	1734	13,5	128	80+	3000	0,8
Auriga C LED1x2400 D337 T830 CLR	195	195	140	2312	18,7	124	80+	3000	0,8
Auriga C LED1x3200 D338 T830 CLR	195	195	140	3063	26,4	116	80+	3000	0,8
Auriga C LED1x1800 D336 T840 CLR	195	195	140	1788	13,5	132	80+	4000	0,8
Auriga C LED1x2400 D337 T840 CLR	195	195	140	2382	18,7	127	80+	4000	0,8
Auriga C LED1x3200 D338 T840 CLR	195	195	140	3153	26,4	119	80+	4000	0,8
Auriga C LED1x1800 D336 T830 OP LT80	195	195	140	1586	13,5	117	80+	3000	0,8
Auriga C LED1x2400 D337 T830 OP LT80	195	195	140	2115	18,7	113	80+	3000	0,8
Auriga C LED1x3200 D338 T830 OP LT80	195	195	140	2801	26,4	106	80+	3000	0,8
Auriga C LED1x1800 D336 T840 OP LT80	195	195	140	1635	13,5	121	80+	4000	0,8
Auriga C LED1x2400 D337 T840 OP LT80	195	195	140	2179	18,7	117	80+	4000	0,8
Auriga C LED1x3200 D338 T840 OP LT80	195	195	140	2884	26,4	109	80+	4000	0,8
Auriga C LED1x1800 D336 T830 MPRZ LT92	195	195	140	1565	13,5	116	80+	3000	0,8
Auriga C LED1x2400 D337 T830 MPRZ LT92	195	195	140	2087	18,7	112	80+	3000	0,8
Auriga C LED1x3200 D338 T830 MPRZ LT92	195	195	140	2764	26,4	105	80+	3000	0,8
Auriga C LED1x1800 D336 T840 MPRZ LT92	195	195	140	1613	13,5	119	80+	4000	0,8
Auriga C LED1x2400 D337 T840 MPRZ LT92	195	195	140	2150	18,7	115	80+	4000	0,8
Auriga C LED1x3200 D338 T840 MPRZ LT92	195	195	140	2845	26,4	108	80+	4000	0,8

*Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

TECHNICAL DATA SHEET

Available options:

T830	Colour temperature 3000K, CRI 80+
T840	Colour temperature 4000K, CRI 80+
T930	Colour temperature 3000K, CRI 90+
T940	Colour temperature 4000K, CRI 90+
OP LT80	Opal diffuser with high light transmittance
MPRZ LT92	Translucent micro-prismatic diffuser with high light transmittance
OP TP(a)	TP(a) rated thermoplastic opal diffuser
DALI	Driver with DALI interface and switch-control dimming
EM3	Emergency version 3 hours
EM3B	Emergency version 3 hours (best available technology)
EM3A	Emergency version equipped with an autonomous testing system, 3 hours


EM3D
WIE3-0.5m

WIE5D-0.5m

QBX3-0.1m

Europlug-1.5m
Europlug-3.0m
RAL

Emergency version 3 hours with DALI interface
3-pole "Wieland - gesis classic" type or compatible connector with 0.5m cable
5-pole DALI "Wieland - gesis classic" type or compatible connector with 0.5m cable
3-pole quick connection box on 0.1m cable, Push-in terminal, 3x2x2.5mm²
2-pole "Europlug" type plug with 2x1.0mm² 1.5m cable
2-pole "Europlug" type plug with 2x1.0mm² 3.0m cable
RAL colour

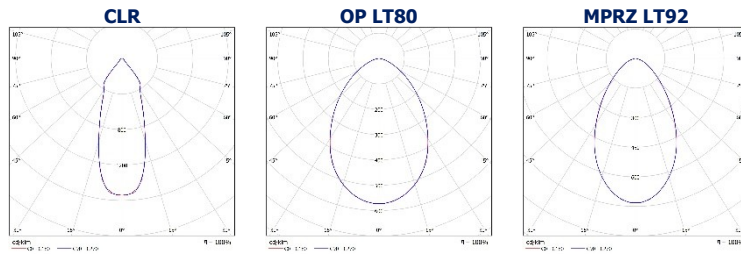

Accessories:



Product: Auriga C LED diffuser 135mm OP LT80
Description: Opal diffuser with high light transmittance



Product: Auriga C LED diffuser 135mm MPRZ LT92
Description: Translucent micro-prismatic diffuser with high light transmittance