




Application: parks, pedestrians, parkings
Assembly: pole top mounted with $\varnothing 60 \times 100$ mm ending
Ingress protection: IP 66 for the optical part and the driver

Material: anodised aluminium alloy
Colour: inox / graphite
Optical system: PMMA optics
Number of LEDs: 20 for 60W, 36W, 48W
Operating temperature range: from -40°C to $+55^{\circ}\text{C}$
Expected useful lifetime: L90F10 – 50 000 h, L80F20 – 100 000 h
CRI: >70 for 5000K, 4000K; >80 for 3500K, 2700K
Input voltage frequency: 50/60Hz
Power factor: ≥ 0.95
Inrush current: : 46A / 250 μs for 60W, 36W, 48W


Luminaire VEGA LED BETA has the possibility to connect to an external control system via DALI interface (optionally via analog signal 1- 10V).



Code	Symbol	LED power	Luminaire Power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux ¹⁾	Luminaire luminous flux ¹⁾	Luminous efficacy	Unit volume	Luminaire net weight
214032/1	VEGA LED BETA 36	36W	42W	600mA	2700K	5 150lm	4750lm	113lm/W	0,068m ³	9,5kg
214032/3	VEGA LED BETA 36	36W	42W	600mA	3500K	5 400lm	5000lm	119lm/W	0,068m ³	9,5kg
214032/4	VEGA LED BETA 36	36W	42W	600mA	4000K	6 350lm	5850lm	139lm/W	0,068m ³	9,5kg
214032/6	VEGA LED BETA 36	36W	42W	600mA	5000K	6 350lm	5850lm	139lm/W	0,068m ³	9,5kg
214033/1	VEGA LED BETA 48	48W	55W	800mA	2700K	6 550lm	6050lm	110lm/W	0,068m ³	9,5kg
214033/3	VEGA LED BETA 48	48W	55W	800mA	3500K	6 900lm	6400lm	116lm/W	0,068m ³	9,5kg
214033/4	VEGA LED BETA 48	48W	55W	800mA	4000K	8 100lm	7500lm	136lm/W	0,068m ³	9,5kg
214033/6	VEGA LED BETA 48	48W	55W	800mA	5000K	8 100lm	7500lm	136lm/W	0,068m ³	9,5kg
214034/1	VEGA LED BETA 60	60W	67W	1000mA	2700K	7 850lm	7250lm	108lm/W	0,068m ³	9,5kg
214034/3	VEGA LED BETA 60	60W	67W	1000mA	3500K	8 250lm	7600lm	113lm/W	0,068m ³	9,5kg
214034/4	VEGA LED BETA 60	60W	67W	1000mA	4000K	9 700lm	8950lm	134lm/W	0,068m ³	9,5kg
214034/6	VEGA LED BETA 60	60W	67W	1000mA	5000K	9 700lm	8950lm	134lm/W	0,068m ³	9,5kg

1) tolerance +/- 5% due to LEDs accuracy

Directive: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE, 2009/125/EC

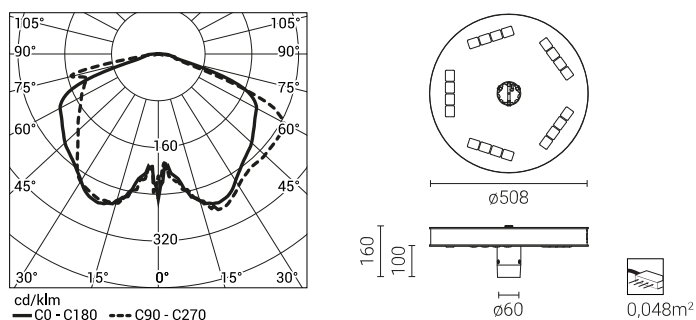

Luminaire VEGA LED BETA in standard has following functions of intelligent power supply:

- Connection to outside control system by DALI interface (operation of analog signal 1-10V as an option),
- Possibility of programming multistage dimming of luminaire, up to 5 intervals in the range of from 10 to 100% of nominal power,
- Temperature protection of LED module (from overheating) in case of unintentional luminaire operation during the,
- Regulation of power / luminous flux – the option of setting another value than the catalogue in the range of 30-100% of nominal one,

Acceptable quantity of luminaires VEGA LED BETA on one circuit, protected by:

Overcurrent switches MCB type B or C

Luminaire	Typ	2A	4A	6A	10A	16A	20A	25A
VEGA LED BETA 36, 48, 60W	B	1	2	4	6	11	13	17
	C	1	4	6	11	18	22	28

Fuse – type gG and GL

Luminaire	2A	4A	6A	10A	16A	20A	25A
VEGA LED BETA 36, 48, 60W	0	4	8	11	21	29	42