



ASKER

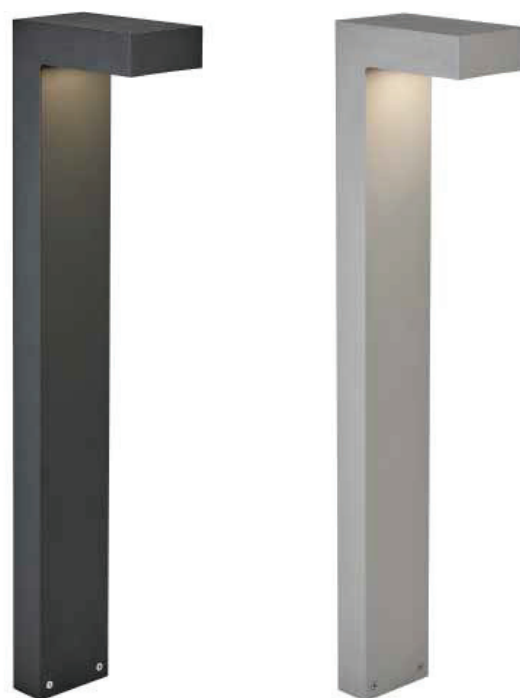

ASKER Powder coated aluminium bollard. Ideal for path-way lighting where light pollution is an issue.									
Art	Watt	Type of light source:	Luminous flux	Colour temperature	Lifetime (L70/B50)	EEL	Lens/optic	Features	Light sharing
1311	9,5W	LED	585 lm	3000K	50 000h	A+	-	-	Symmetric
1314*	7,7W	LED	634 lm	3000K	109 000h	A++	SCL	Dim. Triac	Asymmetric
1316*	7,7W	LED	634 lm	3000K	109 000h	A++	VSM	Dim. Triac	Asymmetric
Accessories for Asker do Art. 1311 i 1314									
1907	Concreting anchor			p. 115					
1908	Anchoring support			p. 115					



*Asker bollard with 4000K or DALI available by request, contact your supplier.