


CORONA D LED

New Concept Recessed LED Luminaire with Microprismatic or Opal Diffuser



CORONA D LED1X3600 E268 T840 MPRZ LT92

Type: A new concept of recessed mounted LED luminaires with microprismatic or opal diffuser for most commercial lighting applications.

Specification: Diffuser: microprismatic (MPRZ LT92) or opal (OP LT80).
Fully enclosed white steel body.
Luminaire is plastic-wrapped and boxed individually.

Installation: Fits 15-24mm exposed T-Bar ceiling 600x600mm.

Application: Indoor. Office buildings, shops and other commercial environments.



Simple installation: Luminaire fitted with ACT+ is as easy to install as a simply switched luminaire. No control wiring, programming or configuration is needed.

Self-learning: ACT+ uses 60-100 hours to learn about its environment – external daylight conditions and other luminaires around it.

Smart energy savings: Compared to a simple switched luminaire, Active+ brings added features – presence detection, daylight harvesting, seamless and comfortable dimming.

Name	Overall dimensions (LxWxH), mm	Life-time	Luminaire output*, lm Ta=25°C	System power*, W	CRI (Ra)	CCT, K	Weight, kg
Corona D LED1x1300 E262 T840 MPRZ LT92	595x295x55	50000	1213	11	80+	4000	2,00
Corona D LED1x1800 E263 T840 MPRZ LT92	595x295x55	50000	1703	15	80+	4000	2,00
Corona D LED1x2500 E265 T840 MPRZ LT92	595x295x55	50000	2433	21	80+	4000	2,00
Corona D LED2x1300 E266 T840 MPRZ LT92	595x595x55	50000	2426	21	80+	4000	3,50
Corona D LED2x1800 E227 T840 MPRZ LT92	595x595x55	50000	3405	29	80+	4000	3,50
Corona D LED2x2500 E230 T840 MPRZ LT92	595x595x55	50000	4867	39	80+	4000	3,50
Corona D LED3x1300 D064 T840 MPRZ LT92	595x595x55	50000	3639	29	80+	4000	3,50
Corona D LED3x1800 D065 T840 MPRZ LT92	595x595x55	50000	5108	43	80+	4000	3,50
Corona D LED3x2500 D066 T840 MPRZ LT92	595x595x55	50000	7300	59	80+	4000	3,50
Corona D LED1x2600 E267 T840 MPRZ LT92	1195x295x55	50000	2560	22	80+	4000	3,50
Corona D LED1x3600 E268 T840 MPRZ LT92	1195x295x55	50000	3594	30	80+	4000	3,50
Corona D LED1x5200 E270 T840 MPRZ LT92	1195x295x55	50000	5138	41	80+	4000	3,50

Name	Overall dimensions (LxWxH), mm	Life-time	Luminaire output*, lm Ta=25°C	System power*, W	CRI (Ra)	CCT, K	Weight, kg
Corona D LED2x2600 E271 T840 MPRZ LT92	1195x595x55	50000	5121	41	80+	4000	6,50
Corona D LED2x3600 E272 T840 MPRZ LT92	1195x595x55	50000	7189	61	80+	4000	6,50
Corona D LED2x5200 E274 T840 MPRZ LT92	1195x595x55	50000	10277	83	80+	4000	6,50

* Tolerance range for optical and electrical data: ±10 %


Name	Overall dimensions (LxWxH), mm	Lifetime	Luminaire output*, lm Ta=25°C	System power*, W	CRI (Ra)	CCT, K	Weight, kg
Corona D LED1x1300 E262 T840 OP LT80	595x295x55	50000	1112	11	80+	4000	2,00
Corona D LED1x1800 E263 T840 OP LT80	595x295x55	50000	1561	15	80+	4000	2,00
Corona D LED1x2500 E265 T840 OP LT80	595x295x55	50000	2231	21	80+	4000	2,00
Corona D LED2x1300 E266 T840 OP LT80	595x595x55	50000	2224	21	80+	4000	3,50
Corona D LED2x1800 E227 T840 OP LT80	595x595x55	50000	3122	29	80+	4000	3,50
Corona D LED2x2500 E230 T840 OP LT80	595x595x55	50000	4461	39	80+	4000	3,50
Corona D LED3x1300 D064 T840 OP LT80	595x595x55	50000	3336	29	80+	4000	3,50
Corona D LED3x1800 D065 T840 OP LT80	595x595x55	50000	4682	43	80+	4000	3,50
Corona D LED3x2500 D066 T840 OP LT80	595x595x55	50000	6692	59	80+	4000	3,50
Corona D LED1x2600 E267 T840 OP LT80	1195x295x55	50000	2347	22	80+	4000	3,50
Corona D LED1x3600 E268 T840 OP LT80	1195x295x55	50000	3295	30	80+	4000	3,50
Corona D LED1x5200 E270 T840 OP LT80	1195x295x55	50000	4710	41	80+	4000	3,50
Corona D LED2x2600 E271 T840 OP LT80	1195x595x55	50000	4694	41	80+	4000	6,50
Corona D LED2x3600 E272 T840 OP LT80	1195x595x55	50000	6590	61	80+	4000	6,50
Corona D LED2x5200 E274 T840 OP LT80	1195x595x55	50000	9420	83	80+	4000	6,50

* Tolerance range for optical and electrical data: ±10 %

Options available on request:

SDIM	– Switch-control/dimming	MPRZ LT92	– Microprismatic diffuser for a better glare protection
DALI	– DALI driver	WIE	– 3-pole Wieland or similar connector
TW	– Tunable white	W625	– To fit 625x625 suspended ceiling (subject to minimum quantity)
BLT	– Bluetooth unit (for wireless control via mobile device)	IP44	– IP44 protection degree
EMG	– Emergency version 1 hour	RAL	– RAL colours
EM3	– Emergency version 3 hours	T830	– Colour temperature 3000K
OP LT80	– Opal diffuser with 80% light transmission	T840	– Colour temperature 4000K

CORONA D LED2X1800 E227 T840 MPRZ LT92

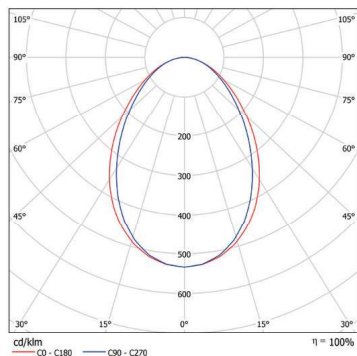

CORONA D LED2X1800 E227 T840 OP LT80

