

# GUELL 1



● GR-94 / Metallic grey / Textured



LED floodlight for indoor and outdoor lighting, comprising:

- Die-cast aluminum housing chemically pre-treated and painted with polyester powder coating
- Flat tempered glass diffuser
- Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- Anti-ageing silicone gasket
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Stainless steel external screws
- Fully integrated stainless steel aluminium spring clips
- Powder coated steel bracket
- On request, versions with dimmable ballast available
- Passive infra-red motion sensor
- 3000 K and 5000 K available upon request



GUELL 1  
S/W



GUELL 1  
A/W

GUELL 1  
C/I




GUELL 1  
S/W

GUELL 1  
A/W

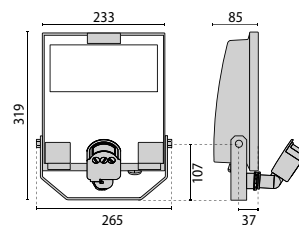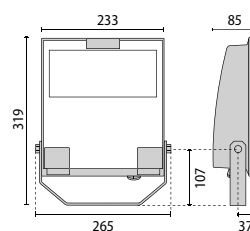






**AC/DC** Possibility of AC/DC versions in accordance with EN 5012 and VDE 0108 (contact the company).

 max 2,5 kg

 0,063 m<sup>2</sup>

 0,018 m<sup>2</sup>

 0,019 m<sup>2</sup>



## GUELL 1 S/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS $\phi$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>															
LED	53 W	I		80	4000	•	S/W	-	7276 lm	6092 lm	70	10	150000 h	●	<b>06105494</b>
LED	39 W	I		80	4000	•	S/W	-	5558 lm	4890 lm	70	10	150000 h	●	<b>06105794</b>

IP 66



## GUELL 1 A/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS $\phi$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>															
LED	53 W	I		80	4000	•	A40/W	-	7276 lm	5950 lm	70	10	150000 h	●	<b>06106694</b>
LED	39 W	I		80	4000	•	A40/W	-	5558 lm	4712 lm	70	10	150000 h	●	<b>06106994</b>

IP 66



## GUELL 1 C/I

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS $\phi$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>															
LED	53 W	I		80	4000	•	C/I	-	7276 lm	5739 lm	70	10	150000 h	●	<b>06289194</b>
LED	39 W	I		80	4000	•	C/I	-	5558 lm	4599 lm	70	10	150000 h	●	<b>06288594</b>

IP 66



## GUELL 1 DETEK S/W

IK07 3J xx5

LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS $\phi$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>															
LED	53 W	I		80	4000	•	S/W	-	7276 lm	6092 lm	70	10	150000 h	●	<b>06119994</b>

IP 44



## GUELL 1 DETEK A/W

IK07 3J xx5


LAMPHOLDER	WATTAGE	CLASS		CRI	KELVIN	COS $\phi$ $\geq 0,9$	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
<b>Power LED 220-240 V 50/60 Hz</b>															
LED	53 W	I		80	4000	•	A40/W	-	7276 lm	5950 lm	70	10	150000 h	●	<b>06114894</b>

IP 44




## OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
<b>GUELL 1</b>		
Protective grid GUELL 1		<b>14172902</b>
Connection box IP 66		<b>14174220</b>
Wall support 500 mm/19.69" GUELL 1/2	●	<b>14173394</b>
Wall support 1000 mm/39.37" GUELL 1/2	●	<b>14173494</b>
Single pole top support GUELL 1	●	<b>14453194</b>
Double pole top support GUELL 1	●	<b>14453294</b>
<b>GUELL 1 A/W - GUELL 1 S/W</b>		
Soft glass GUELL 1	●	<b>14173294</b>
<b>GUELL 1 A/W</b>		
Louvre GUELL 1 Asymmetrical		<b>14173120</b>
<b>GUELL 1 S/W</b>		
Louvre GUELL 1 Symmetrical		<b>14173020</b>
<b>GUELL 1 C/I</b>		
GUELL 1 C/I frosted glass.	●	<b>14476594</b>




14172902

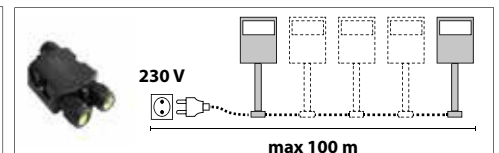

14174220



14173394



14173494




14453194



14453294



14173294



14173120



14173020



14476594