


GUELL 4

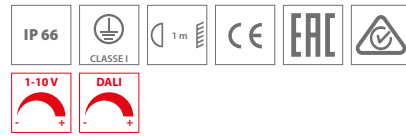

● GR-94 / Metallic grey / Textured

LED floodlight for indoor and outdoor lighting, comprising:

- Die-cast aluminum housing chemically pre-treated and painted with polyester powder coating
- Flat extra clear tempered glass diffuser
- Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- Anti-ageing silicone gasket
- Electrical connection box in black technopolymer
- Cable gland for cables Ø 7 - Ø 17 mm
- The versions with A50/W optics comprise LED modules and reflectors specifically studied for settings that require highly asymmetrical light distribution.
- Stainless steel external screws
- Fully integrated stainless steel aluminium spring clips
- Steel bracket, hot galvanised and painted in polyester powder
- Cataphoresis and polyester powder coated steel sheet gear housing
- 3000 K and 5000 K available upon request




GUELL 4
S/W



GUELL 4
A/W



GUELL 4
A50/W

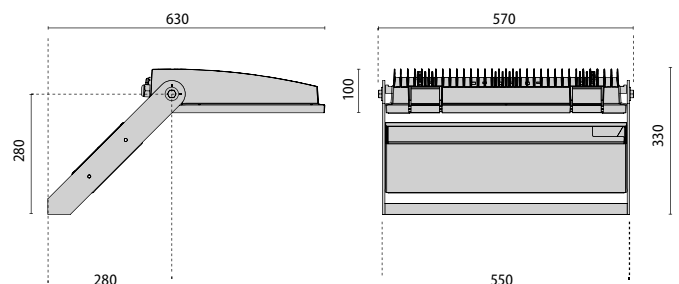

GUELL 4 S/W

IK07 3J xx5

| LAMPHOLDER | WATTAGE | CLASS | | CRI | KELVIN | COS ϕ $\geq 0,9$ | OPTIC | OPTIC BEAM | LIGHTSOURCE LUMEN OUTPUT | LUMINAIRE LUMEN OUTPUT | L | B | LIFETIME | COLOUR/ RAL | PART NUMBER |
|--|---------|-------|--|-----|--------|-----------------------|-------|------------|--------------------------|------------------------|----|----|----------|-------------|-----------------|
| Power LED dimmable 1-10 V 220-240 V 50/60 Hz | | | | | | | | | | | | | | | |
| LED | 430 W | I | | 80 | 4000 | • | S/W | - | 58452 lm | 50573 lm | 70 | 10 | 130000 h | ● | 06210094 |



GUELL 4 A/W

IK07 3J xx5

| LAMPHOLDER | WATTAGE | CLASS | | CRI | KELVIN | COS ϕ $\geq 0,9$ | OPTIC | OPTIC BEAM | LIGHTSOURCE LUMEN OUTPUT | LUMINAIRE LUMEN OUTPUT | L | B | LIFETIME | COLOUR/ RAL | PART NUMBER |
|--|---------|-------|--|-----|--------|-----------------------|-------|------------|--------------------------|------------------------|----|----|----------|-------------|-----------------|
| Power LED dimmable 1-10 V 220-240 V 50/60 Hz | | | | | | | | | | | | | | | |
| LED | 430 W | I | | 80 | 4000 | • | A40/W | - | 58452 lm | 46372 lm | 70 | 10 | 130000 h | ● | 06210394 |



GUELL 4 A50/W

IK07 3J xx5

| LAMPHOLDER | WATTAGE | CLASS | | CRI | KELVIN | COS ϕ $\geq 0,9$ | OPTIC | OPTIC BEAM | LIGHTSOURCE LUMEN OUTPUT | LUMINAIRE LUMEN OUTPUT | L | B | LIFETIME | COLOUR/ RAL | PART NUMBER |
|--|---------|-------|--|-----|--------|-----------------------|-------|------------|--------------------------|------------------------|----|----|----------|-------------|---------------|
| Power LED - dimmable DALI 220-240 V 50/60 Hz | | | | | | | | | | | | | | | |
| LED | 448 W | I | | 80 | 4000 | • | A50/W | - | 72511 lm | 52346 lm | 80 | 10 | 55000 h | ● | 306128 |




OPTIONAL ACCESSORIES


| DESCRIPTION | COLOR | PART NUMBER |
|--------------------------|-------|-----------------|
| GUELL 4 A/W - S/W | | |
| Vetro soft GUELL 4 | ● | 14465794 |
| GUELL 4 | | |
| Protective grid | | 14452702 |
| Cover | ● | 14452894 |



14465794



14452702



14452894

