



## 609001 HYDROBOULEVARD 01 180 LED

220mm height bollard, round shape, for outdoor surface installation, 180° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included- Built-in LED driver 220-240V 50-60Hz, with 12 CREE XH-G mid-power LED. IP65 rating.

**Designed by MOMO DESIGN.**



BY **MOMODESIGN**



### Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body and frame.
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 12 CREE XH-G mid-power LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser
- Anchorage unit included

**1...10 V** **DALI**  
1-10 V DIMMABLE / DALI VERSION  
AVAILABLE ON REQUEST

|  | LIGHT SOURCE  | LED COLOR*            | LIGHT BEAM OPTIONS | LUMEN OUTPUT (lm) | LUMINOUS EFFICACY (lm/w) | COLORS OPTIONS   |
|--|---------------|-----------------------|--------------------|-------------------|--------------------------|--|
| 9 WATT<br>220-240V 50-60HZ ELECTRONIC<br>IP65<br>4,00 KG UNIT GROSS WEIGHT | MID-POWER LED | 3.000°K<br>WARM-WHITE | 180°               | 800               | 88.88±                   | <ul style="list-style-type: none"> <li>TEXTURED GREY</li> <li>MATT BLACK (ON REQUEST)</li> </ul> |

\* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ○ 4000°K NEURAL WHITE




## 609002 HYDROBOULEVARD 01 360 LED

220mm height bollard, round shape, for outdoor surface installation, 360° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included- Built-in LED driver 220-240V 50-60Hz, with 24 CREE XH-G mid-power LED. IP65 rating.

**Designed by MOMO DESIGN.**



BY **MOMODESIGN**

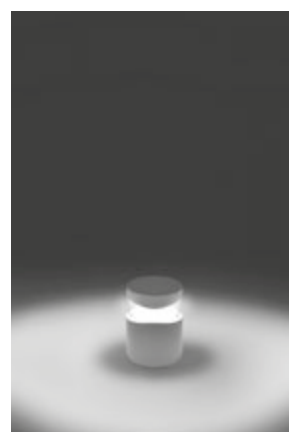

### Energy Label **A++**

- Material: high corrosion resistance die-cast copper-free aluminum body and frame.
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 24 CREE XH-G mid-power LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser
- Anchorage unit included

**1...10 V** **DALI**  
1-10 V DIMMABLE / DALI VERSION  
AVAILABLE ON REQUEST

|   | LIGHT SOURCE  | LED COLOR*            | LIGHT BEAM OPTIONS | LUMEN OUTPUT (lm) | LUMINOUS EFFICACY (lm/w) | COLORS OPTIONS   |
|---|---------------|-----------------------|--------------------|-------------------|--------------------------|--|
| 18 WATT<br>220-240V 50-60HZ ELECTRONIC<br>IP65<br>4,20 KG UNIT GROSS WEIGHT | MID-POWER LED | 3.000°K<br>WARM-WHITE | 360°               | 1.600             | 84.21                    | <ul style="list-style-type: none"> <li>TEXTURED GREY</li> <li>MATT BLACK (ON REQUEST)</li> </ul> |

\* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ○ 4000°K NEURAL WHITE

**609003 HYDROBOULEVARD 02 180 LED**

BY **MOMODESIGN**



600mm height bollard, round shape, for outdoor surface installation, 180° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included- Built-in LED driver 220-240V 50-60Hz, with 12 CREE XH-G mid-power LED. IP65 rating.

**Designed by MOMO DESIGN.**

**Energy Label** **A++**



- Material: high corrosion resistance die-cast copper-free aluminum body and frame.
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 12 CREE XH-G mid-power LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser
- Anchorage unit included

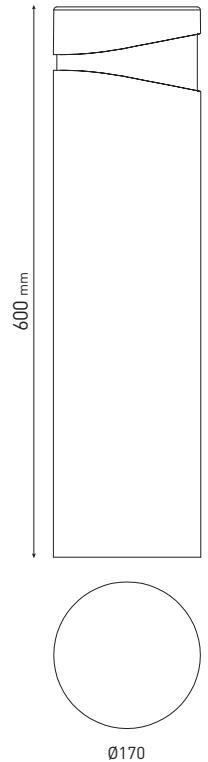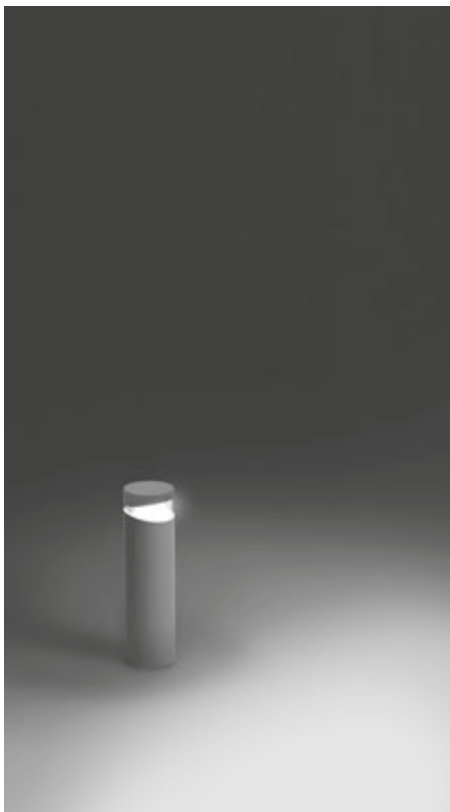

**1...10 V** **DALI**  
1-10 V DIMMABLE / DALI VERSION  
AVAILABLE ON REQUEST

|  | LIGHT SOURCE  | LED COLOR*            | LIGHT BEAM OPTIONS | LUMEN OUTPUT (lm) | LUMINOUS EFFICACY (lm/w) | COLORS OPTIONS  |
|--|---------------|-----------------------|--------------------|-------------------|--------------------------|---|
| 9 WATT<br>220-240V 50-60HZ ELECTRONIC<br>IP65<br>5,50 KG UNIT GROSS WEIGHT | MID-POWER LED | 3.000°K<br>WARM-WHITE | 180°               | 800               | 88.88                    | <div style="display: flex; gap: 10px;"> <div style="width: 15px; height: 15px; background-color: #cccccc; border: 1px solid black;"></div> TEXTURED GREY                     <div style="width: 15px; height: 15px; background-color: #333333; border: 1px solid black;"></div> MATT BLACK<br/><i>(ON REQUEST)</i> </div> |

\* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ○ 4000°K NEURAL WHITE

**609004 HYDROBOULEVARD 02 360 LED**



600mm height bollard, round shape, for outdoor surface installation, 360° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included- Built-in LED driver 220-240V 50-60Hz, with 24 CREE XH-G mid-power LED. IP65 rating.

**Designed by MOMO DESIGN.**





BY **MOMODESIGN**

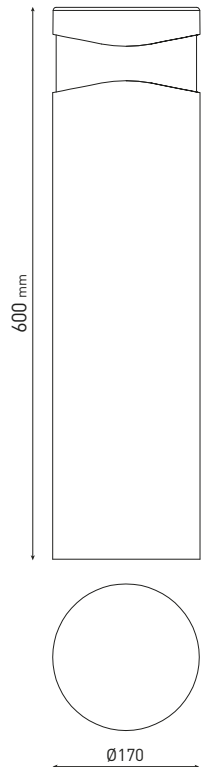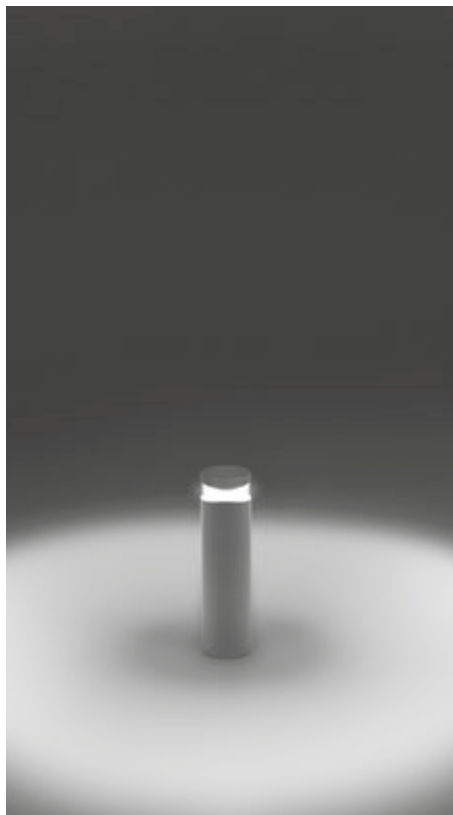**Energy Label** A++

- Material: high corrosion resistance die-cast copper-free aluminum body and frame.
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 24 CREE XH-G mid-power LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser
- Anchorage unit included



1-10 V DIMMABLE / DALI VERSION  
AVAILABLE ON REQUEST

|   | LIGHT SOURCE  | LED COLOR*   | LIGHT BEAM OPTIONS  | LUMEN OUTPUT (lm) | LUMINOUS EFFICACY (lm/w) | COLORS OPTIONS   |
|---|---------------|--|---|-------------------|--------------------------|--|
| 18 WATT<br>220-240V 50-60HZ ELECTRONIC<br>IP65<br>5,70 KG UNIT GROSS WEIGHT | MID-POWER LED | <br>3.000°K<br>WARM-WHITE | <br>360° | 1.600             | 84.21                    |  TEXTURED GREY<br> MATT BLACK (ON REQUEST) |

\* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ○ 4000°K NEURAL WHITE

**609005 HYDROBOULEVARD 03 180 LED**



1000mm height bollard, round shape, for outdoor surface installation, 180° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included- Built-in LED driver 220-240V 50-60Hz, with 12 CREE XH-G mid-power LED. IP65 rating.

**Designed by MOMO DESIGN.**

**Energy Label** A++

- Material: high corrosion resistance die-cast copper-free aluminum body and frame.
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 12 CREE XH-G mid-power LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser
- Anchorage unit included

BY **MOMO DESIGN**

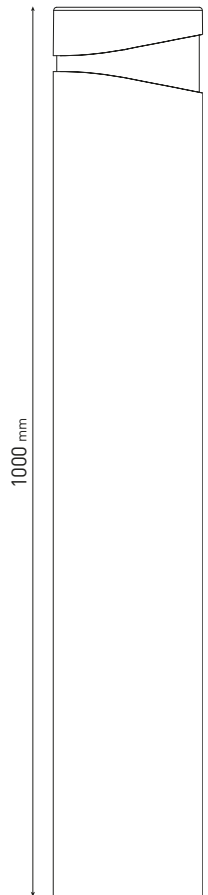

**1...10 V** **DALI**  
1-10 V DIMMABLE / DALI VERSION  
AVAILABLE ON REQUEST

|  | LIGHT SOURCE  | LED COLOR*         | LIGHT BEAM OPTIONS | LUMEN OUTPUT (lm) | LUMINOUS EFFICACY (lm/w) | COLORS OPTIONS   |
|--|---------------|--------------------|--------------------|-------------------|--------------------------|--|
| 9 WATT<br>220-240V 50-60HZ ELECTRONIC<br>IP65<br>7,00 KG UNIT GROSS WEIGHT | MID-POWER LED | 3.000°K WARM-WHITE | 180°               | 800               | 88.88                    | <div style="display: flex; gap: 10px;"> <div style="width: 15px; height: 15px; background-color: #ccc; border: 1px solid #000;"></div> TEXTURED GREY                     <div style="width: 15px; height: 15px; background-color: #000; border: 1px solid #000;"></div> MATT BLACK (ON REQUEST)                 </div> |

\* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ○ 4000°K NEURAL WHITE

**609006 HYDROBOULEVARD 03 360 LED**




1000mm height bollard, round shape, for outdoor surface installation, 360° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included- Built-in LED driver 220-240V 50-60Hz, with 24 CREE XH-G mid-power LED. IP65 rating.

**Designed by MOMO DESIGN.**

BY **MOMO DESIGN**

**Energy Label** A++

- Material: high corrosion resistance die-cast copper-free aluminum body and frame.
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 24 CREE XH-G mid-power LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser
- Anchorage unit included

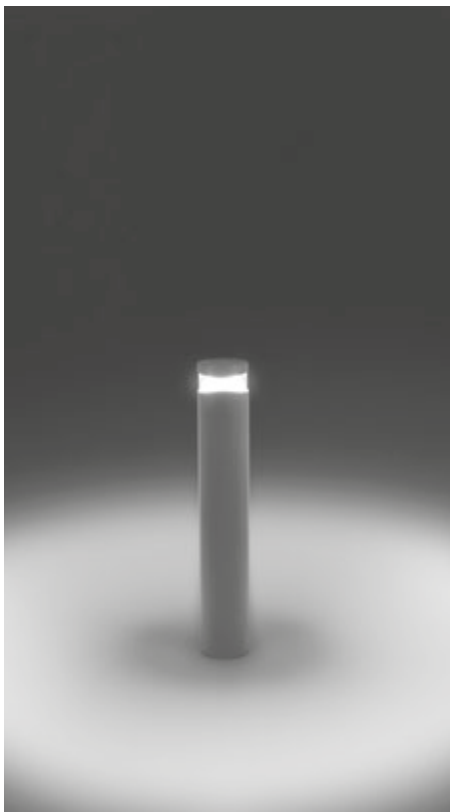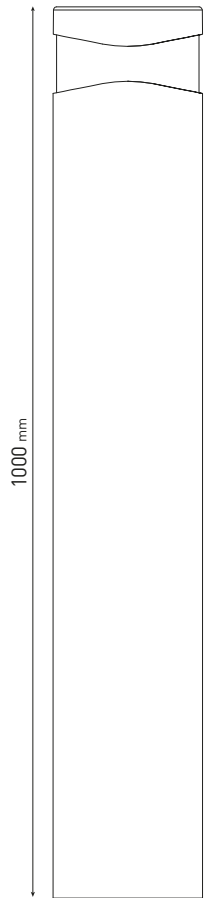

**1...10 V** **DALI**  
1-10 V DIMMABLE / DALI VERSION  
AVAILABLE ON REQUEST

|   | LIGHT SOURCE  | LED COLOR*            | LIGHT BEAM OPTIONS | LUMEN OUTPUT (lm) | LUMINOUS EFFICACY (lm/w) | COLORS OPTIONS   |
|---|---------------|-----------------------|--------------------|-------------------|--------------------------|--|
| 18 WATT<br>220-240V 50-60HZ ELECTRONIC<br>IP65<br>7,20 KG UNIT GROSS WEIGHT | MID-POWER LED | 3.000°K<br>WARM-WHITE | 360°               | 1.600             | 84.21                    | <span style="display: inline-block; width: 15px; height: 15px; background-color: #ccc; border: 1px solid #000;"></span> TEXTURED GREY<br><span style="display: inline-block; width: 15px; height: 15px; background-color: #000; border: 1px solid #000;"></span> MATT BLACK (ON REQUEST) |

\* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ○ 4000°K NEURAL WHITE