


3 ANNI DI GARANZIA  
3 YEARS OF WARRANTY



### L03F (fisso - fixed)

| Code            | Frame | Nominal/lm | Real/lm | LED/W | System/W | CCT   | Beam |
|-----------------|-------|------------|---------|-------|----------|-------|------|
| L03F/WCM/3K07/_ |       | 650        | 596     | 7     | 9        | 3000K | 25°  |
| L03F/WCM/4K07/_ | W     | 700        | 642     | 7     | 9        | 4000K | 25°  |
| L03F/WCF/3K07/_ |       | 650        | 551     | 7     | 9        | 3000K | 40°  |
| L03F/WCF/4K07/_ |       | 700        | 593     | 7     | 9        | 4000K | 40°  |
| L03F/BCM/3K07/_ |       | 650        | 596     | 7     | 9        | 3000K | 25°  |
| L03F/BCM/4K07/_ | B     | 700        | 642     | 7     | 9        | 4000K | 25°  |
| L03F/BCF/3K07/_ |       | 650        | 551     | 7     | 9        | 3000K | 40°  |
| L03F/BCF/4K07/_ |       | 700        | 593     | 7     | 9        | 4000K | 40°  |

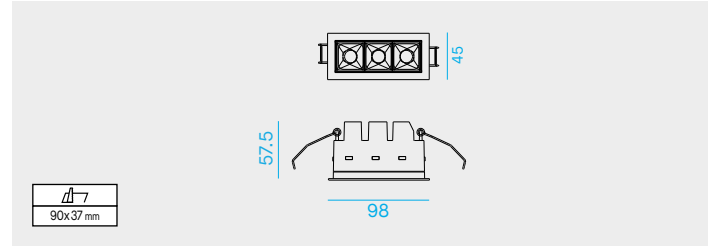

Incastro a LED per installazione a soffitto. Versione fissa.

Recessed LED fitting for false ceiling installation. Fixed version.

Appareil à encastrer LED pour installation dans faux-plafond. Version fixe.

LED-Einbau für Deckeninstallation in 3 Massen.

LED OSRAM CRI>90

OSRAM LED CRI>90

LED OSRAM IRC>90

LED OSRAM CRI>90

Life time 50.000h (L70B10).

Life time 50.000h (L70B10).

Durée de vie 50.000h (L70B10).

Lebensdauer 50.000h (L70B10).

Corpo in alluminio. Cornice bianco o nera.

Body in aluminium. White or black frame.

Corps en aluminium. Cadre blanc ou noir.

Körper Aluminium. Weißer oder schwarzer Rahmen

Riflettori in policarbonato in 4 finiture diverse:  
B= nero  
M= argento opaco  
W= bianco  
G= oro

Polycarbonate reflector in 4 different finishing:  
B= black  
M= silver mat  
W= white  
G= gold

Réflecteur en polycarbonate en 3 finitions différentes :  
B= noir  
M= argent mat  
W= blanc  
G= or



Polycarbonat Reflektor in 4 verschiedenen Ausführungen:  
B= Schwarz  
M= Silber matt  
W= Weiss  
G= Gold

Alimentatore 220-240V - 50/60Hz incluso.

220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V - 50/60Hz enthalten.

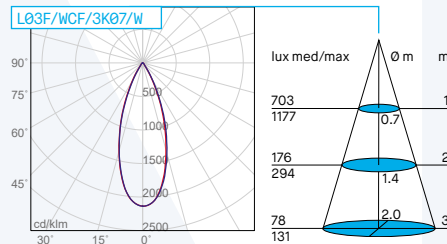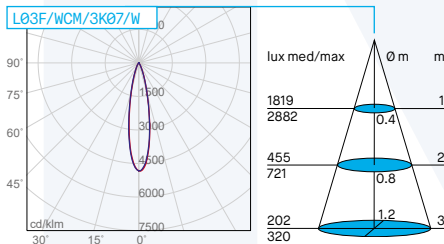

Versioni prodotto disponibili su richiesta - Product versions available upon request - Versions du produit disponibles sur demande - Produktversion auf Anfrage erhältlich

| Code               | Descrizione                             | Description                              | Description                                    | Beschreibung                            |
|--------------------|---|--|--|---|
| L03F/___/___/___/1 | Con driver ON-OFF Made in Italy         | With Made in Italy ON-OFF driver         | Avec alimentation ON-OFF Made in Italy         | Mit Driver ON-OFF Made in Italy         |
| L03F/___/___/___/2 | Con driver PUSH/DIM 1-10V Made in Italy | With Made in Italy PUSH/DIM 1-10V driver | Avec alimentation PUSH/DIM 1-10V Made in Italy | Mit Driver PUSH/DIM 1-10V Made in Italy |
| L03F/___/___/___/3 | Con driver DALI Made in Italy           | With Made in Italy DALI driver           | Avec alimentation DALI Made in Italy           | Mit Driver DALI Made in Italy           |
| L03F/___/___/___/6 | Con driver ON-OFF                       | With ON-OFF driver                       | Avec alimentation ON-OFF                       | Mit Driver ON-OFF                       |

Accessori disponibili su richiesta - Accessories available upon request

| Code | Descrizione  | Description  |
|------|--|--|
| 5861 | Interfaccia Bluetooth regolazione tramite APP o pulsante NA. Solo per versione /2        | Bluetooth interface, control via App or NO button. Only for version /2     |
| 5864 | Interfaccia Wi-Fi regolazione tramite gateway Zigbee (non fornito). Solo per versione /2 | Wi-Fi interface through Zigbee gateway (not included). Only for version /2 |

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secours disponible sur demande - Notfall Kit auf Anfrage erhältlich

| Code          | Descrizione                                     | Description                                      | Description  | Beschreibung                                     |
|---------------|---|--|--|--|
| KIT EM/LED/1H | Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah | Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah | Kit éclairage secours pour LED 1 heure - Batt.7.2V - 1.5Ah | Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah |
| KIT EM/LED/3H | Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah   | Emergency kit for LED 3 hours - Batt.7.2V - 4Ah  | Kit éclairage secours pour LED 3 heures - Batt.7.2V - 4Ah  | Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah  |