


2 ANNI DI GARANZIA
2 YEARS OF WARRANTY



L05F (fisso - fixed)

Code	Frame	Nominal/lm	Real/lm	LED/W	System/W	CCT	Beam
L05F/WCM/3K11/_	W	1050	963	11	13	3000K	25°
L05F/WCM/4K11/_		1100	1009	11	13	4000K	25°
L05F/WCF/3K11/_		1050	890	11	13	3000K	40°
L05F/WCF/4K11/_	B	1100	932	11	13	4000K	40°
L05F/BCM/3K11/_		1050	963	11	13	3000K	25°
L05F/BCM/4K11/_		1100	1009	11	13	4000K	25°
L05F/BCF/3K11/_		1050	890	11	13	3000K	40°
L05F/BCF/4K11/_		1100	932	11	13	4000K	40°

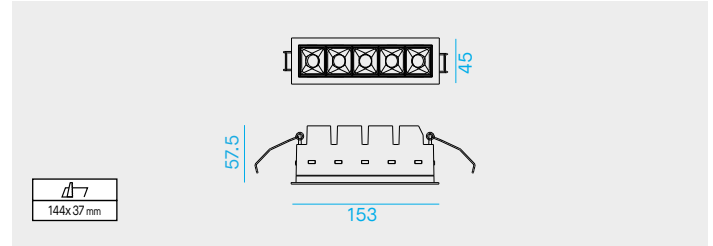

Incastro a LED per installazione a soffitto. Versione fissa.

Recessed LED fitting for false ceiling installation. Fixed version.

Appareil à encastrer LED pour installation dans faux-plafond. Version fixe.

LED-Einbau für Deckeninstallation in 3 Massen.

LED OSRAM CRI>90

OSRAM LED CRI>90

LED OSRAM IRC>90

LED OSRAM CRI>90

Life time 50.000h (L70B10).

Life time 50.000h (L70B10).

Durée de vie 50.000h (L70B10).

Lebensdauer 50.000h (L70B10).

Corpo in alluminio. Cornice bianco o nera.

Body in aluminium. White or black frame.

Corps en aluminium. Cadre blanc ou noir.

Körper Aluminium. Weißer oder schwarzer Rahmen

Riflettori in policarbonato in 4 finiture diverse:
B= nero
M= argento opaco
W= bianco
G= oro

Polycarbonate reflector in 4 different finishing:
B= black
M= silver mat
W= white
G= gold

Réflecteur en polycarbonate en 3 finitions différentes :
B= noir
M= argent mat
W= blanc
G= or



Polycarbonat Reflektor in 4 verschiedenen Ausführungen:
B= Schwarz
M= Silber matt
W= Weiss
G= Gold

Alimentatore 220-240V - 50/60Hz incluso.

220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V - 50/60Hz enthalten.

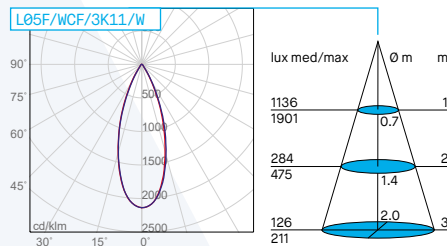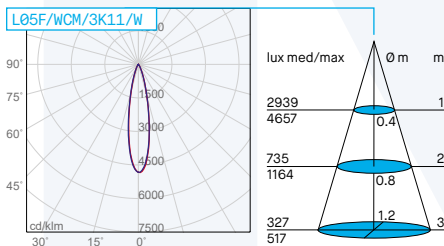

Versioni prodotto disponibili su richiesta - Product versions available upon request - Versions du produit disponibles sur demande - Produktversion auf Anfrage erhältlich



Code	Descrizione	Description	Description	Beschreibung
L05F/_/_/_/_/_/1	Con driver ON-OFF Made in Italy	With Made in Italy ON-OFF driver	Avec alimentation ON-OFF Made in Italy	Mit Driver ON-OFF Made in Italy
L05F/_/_/_/_/_/2	Con driver PUSH/DIM 1-10V Made in Italy	With Made in Italy PUSH/DIM 1-10V driver	Avec alimentation PUSH/DIM 1-10V Made in Italy	Mit Driver PUSH/DIM 1-10V Made in Italy
L05F/_/_/_/_/_/3	Con driver DALI Made in Italy	With Made in Italy DALI driver	Avec alimentation DALI Made in Italy	Mit Driver DALI Made in Italy
L05F/_/_/_/_/_/6	Con driver ON-OFF	With ON-OFF driver	Avec alimentation ON-OFF	Mit Driver ON-OFF

Accessori disponibili su richiesta - Accessories available upon request

Code	Descrizione	Description
5861	Interfaccia Bluetooth regolazione tramite APP o pulsante NA. Solo per versione /2	Bluetooth interface, control via App or NO button. Only for version /2
5864	Interfaccia Wi-Fi regolazione tramite gateway Zigbee (non fornito). Solo per versione /2	Wi-Fi interface through Zigbee gateway (not included). Only for version /2

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secours disponible sur demande - Notfall Kit auf Anfrage erhältlich

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secours pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secours pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah

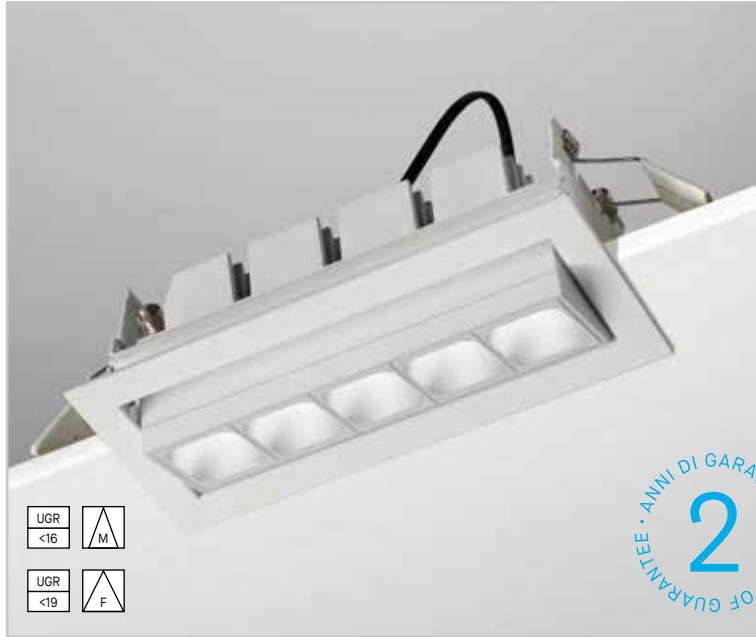


2 ANNI DI GARANZIA
2 YEARS OF WARRANTY



L05A (orientabile - adjustable)

Code	Frame	Nominal/lm	Real/lm	LED/W	System/W	CCT	Beam
L05A/WCM/3K11/_		1050	963	11	13	3000K	25°
L05A/WCM/4K11/_	W	1100	1009	11	13	4000K	25°
L05A/WCF/3K11/_		1050	890	11	13	3000K	40°
L05A/WCF/4K11/_		1100	932	11	13	4000K	40°
L05A/BCM/3K11/_		1050	963	11	13	3000K	25°
L05A/BCM/4K11/_	B	1100	1009	11	13	4000K	25°
L05A/BCF/3K11/_		1050	890	11	13	3000K	40°
L05A/BCF/4K11/_		1100	932	11	13	4000K	40°

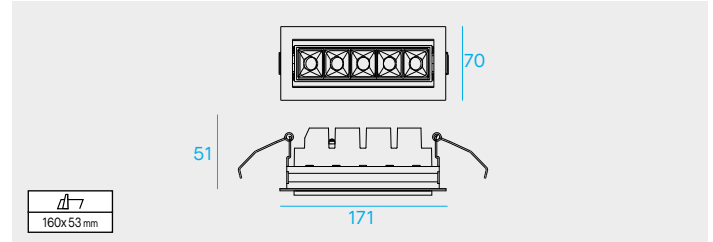

Incasso a LED per installazione a soffitto. Versione orientabile.

Recessed LED fitting for false ceiling installation. Adjustable version.

Appareil à encastrer LED pour installation dans faux-plafond. Version réglable.

LED-Einbau für Deckeninstallation in 3 Massen.

LED OSRAM CRI>90

OSRAM LED CRI>90

LED OSRAM IRC>90

LED OSRAM CRI>90

Life time 50.000h (L70B10).

Life time 50.000h (L70B10).

Durée de vie 50.000h (L70B10).

Lebensdauer 50.000h (L70B10).

Corpo in alluminio. Cornice bianco o nera.

Body in aluminium. White or black frame.

Corps en aluminium. Cadre blanc ou noir.

Körper Aluminium. Weißer oder schwarzer Rahmen

Riflettori in policarbonato in 4 finiture diverse:
B= nero
M= argento opaco
W= bianco
G= oro

Polycarbonate reflector in 4 different finishing:
B= black
M= silver mat
W= white
G= gold

Réflecteur en polycarbonate en 3 finitions différentes :
B= noir
M= argent mat
W= blanc
G= or



Polycarbonat Reflektor in 4 verschiedenen Ausführungen:
B= Schwarz
M= Silber matt
W= Weiss
G= Gold

Alimentatore 220-240V - 50/60Hz incluso.

220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V - 50/60Hz enthalten.



Versioni prodotto disponibili su richiesta - Product versions available upon request - Versions du produit disponibles sur demande - Produktversion auf Anfrage erhältlich

Code	Descrizione	Description	Description	Beschreibung
L05A/_/_/_/_/_/1	Con driver ON-OFF Made in Italy	With Made in Italy ON-OFF driver	Avec alimentation ON-OFF Made in Italy	Mit Driver ON-OFF Made in Italy
L05A/_/_/_/_/_/2	Con driver PUSH/DIM 1-10V Made in Italy	With Made in Italy PUSH/DIM 1-10V driver	Avec alimentation PUSH/DIM 1-10V Made in Italy	Mit Driver PUSH/DIM 1-10V Made in Italy
L05A/_/_/_/_/_/3	Con driver DALI Made in Italy	With Made in Italy DALI driver	Avec alimentation DALI Made in Italy	Mit Driver DALI Made in Italy
L05A/_/_/_/_/_/6	Con driver ON-OFF	With ON-OFF driver	Avec alimentation ON-OFF	Mit Driver ON-OFF

Accessori disponibili su richiesta - Accessories available upon request

Code	Descrizione	Description
5861	Interfaccia Bluetooth regolazione tramite APP o pulsante NA. Solo per versione /2	Bluetooth interface, control via App or NO button. Only for version /2
5864	Interfaccia Wi-Fi regolazione tramite gateway Zigbee (non fornito). Solo per versione /2	Wi-Fi interface through Zigbee gateway (not included). Only for version /2


Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secours disponible sur demande - Notfall Kit auf Anfrage erhältlich

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secours pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secours pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah



L05F/_W (wall washer)

Code	Frame	Nominal/lm	Real/lm	LED/W	System/W	CCT	Beam
L05F/WCW/3K11/M	W	1050	499	11	13	3000K	--
L05F/WCW/4K11/M	W	1100	523	11	13	4000K	--
L05F/BCW/3K11/M	B	1050	499	11	13	3000K	--
L05F/BCW/4K11/M	B	1100	523	11	13	4000K	--

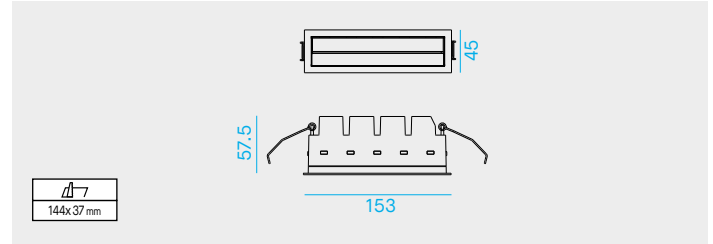

Incasto a LED per installazione a soffitto. Versione wall washer.

LED OSRAM CRI>90

Life time 50.000h (L70B10).

Corpo in alluminio.
Cornice bianco o nera.

Riflettore in policarbonato:
M= argento opaco

Alimentatore 220-240V - 50/60Hz incluso.

Recessed LED fitting for false ceiling installation. Wall washer version.

OSRAM LED CRI>90

Life time 50.000h (L70B10).

Body in aluminium. White or black frame.

Polycarbonate reflector:
M= silver mat

220-240V - 50/60Hz power supply included.

Appareil à encastrer LED pour installation dans faux-plafond. Version wall washer.

LED OSRAM IRC>90

Durée de vie 50.000h (L70B10).

Corps en aluminium. Cadre blanc ou noir.

Réflecteur en polycarbonate:
M= argent mat

Alimentation 220-240V - 50/60Hz incluse.

LED-Einbau für Deckeninstallation in 3 Massen.

LED OSRAM CRI>90


Lebensdauer 50.000h (L70B10).

Körper Aluminium. Weißer oder schwarzer Rahmen

Polycarbonat Reflektor:
M= Silber matt

Netzgerät 220-240V - 50/60Hz enthalten.

L05F/WCW/3K11/M

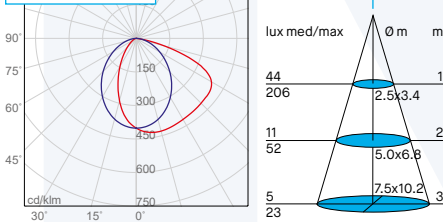

Versioni prodotto disponibili su richiesta - Product versions available upon request - Versions du produit disponibles sur demande - Produktversion auf Anfrage erhältlich

Code	Descrizione	Description	Description	Beschreibung
L05F/_W/___/M1	Con driver ON-OFF Made in Italy	With Made in Italy ON-OFF driver	Avec alimentation ON-OFF Made in Italy	Mit Driver ON-OFF Made in Italy
L05F/_W/___/M2	Con driver PUSH/DIM 1-10V Made in Italy	With Made in Italy PUSH/DIM 1-10V driver	Avec alimentation PUSH/DIM 1-10V Made in Italy	Mit Driver PUSH/DIM 1-10V Made in Italy
L05F/_W/___/M3	Con driver DALI Made in Italy	With Made in Italy DALI driver	Avec alimentation DALI Made in Italy	Mit Driver DALI Made in Italy
L05F/_W/___/M6	Con driver ON-OFF	With ON-OFF driver	Avec alimentation ON-OFF	Mit Driver ON-OFF

Accessori disponibili su richiesta - Accessories available upon request

Code	Descrizione	Description
5861	Interfaccia Bluetooth regolazione tramite APP o pulsante NA. Solo per versione /2	Bluetooth interface, control via App or NO button. Only for version /2
5864	Interfaccia Wi-Fi regolazione tramite gateway Zigbee (non fornito). Solo per versione /2	Wi-Fi interface through Zigbee gateway (not included). Only for version /2

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secours disponible sur demande - Notfall Kit auf Anfrage erhältlich

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secours pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secours pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah