


## ASKER

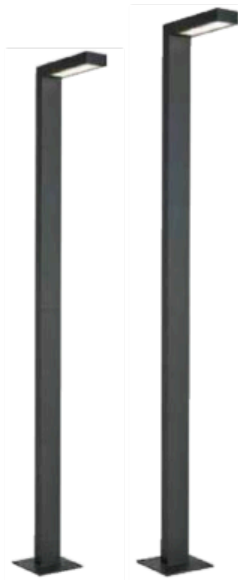


**ASKER** Aluminium powder coated pole. Ideal for path-way lighting where light pollution is an issue.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	IP	Version	Lens	Height
1360	18W	LED	962lm	3000K	50 000h	Dim, Triac	65/55	two-piece	-	216cm
1361	8,4W	LED	1033 lm	3000K	>120 000h	On/off	65/55	two-piece	IESNA Type III	216cm
1363	18W	LED	962 lm	3000K	50 000h	Dim, Triac	65	one-piece	-	236cm
1364	8,4W	LED	1033 lm	3000K	>120 000h	On/off	65	one-piece	IESNA Type V	236cm
1366	8,4W	LED	1018 lm	3000K	>120 000h	On/off	65/55	two-piece	IESNA Type III	216cm
1367	8,4W	LED	1033 lm	3000K	>120 000h	On/off	65	one-piece	IESNA Type III	236cm
5202	19,6W	LED	2550 lm	3000K	>120 000h	On/off	65/55	two-piece	IESNA Type V	350cm
5206	19,6W	LED	2520 lm	3000K	>120 000h	On/off	65/55	two-piece	IESNA Type II	350cm

## ACCESSORIES Asker

116	Concreting anchor	p. 130
117	Anchoring support	p. 130

2750/4000K or DALI2 available by request, contact your supplier.



Art. 5202, 5206