




# LEPUS W LED

## Emergency Lighting

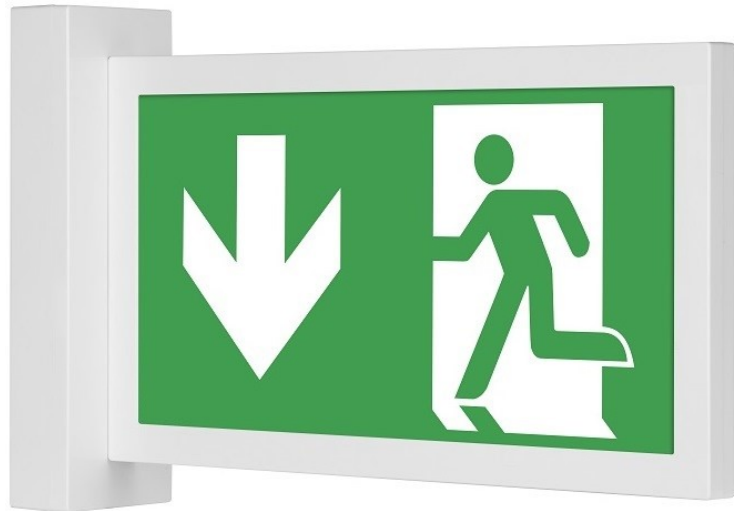

**Images for the product family and options:**

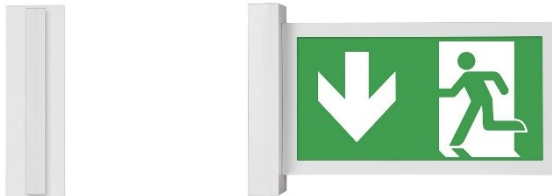

**Description:** Wall-mounted double-sided LED emergency exit sign / escape luminaire  
 Light distribution type: omnidirectional  
 Optical system: clear PMMA diffuser  
 Housing: polycarbonate  
 Colour: white  
 Battery charging time: 24 hours (12 hours optional: AUT)  
 Battery: NiCd (LiFePO<sub>4</sub> optional: AUT), deep discharge protection  
 Recognition distance: 30 meters

**General data:** Mains voltage: 220-240V, 50-60Hz  
 LED lifetime, h: 50000/L80B50  
 SDCM: 3  
 Protection class IEC: II  
 Ingress protection code: IP40  
 Mechanical impact resistance: IK05  
 Operating temperature range, °C: ta 0...+40

**Installation:** On the wall. Push-in terminal, 3x2x2.5mm<sup>2</sup>

**Environment:** Indoor

**Application:** Emergency exit sign



Supplied with universal sticker kit.

Product	Length, mm	Width, mm	Height, mm	Illumination mode	Emergency operating time, h	Power in emergency mode, W*	CRI *	CCT, K*	Weight, kg
Lepus W 1PLED G066	377	72	232	M/NM	1	1	80+	6500	1,35
Lepus W 3PLED G067	377	72	232	M/NM	3	1	80+	6500	1,40
Lepus W 1PLED G066 TEST	377	72	232	M/NM	1	1	80+	6500	1,35
Lepus W 3PLED G067 TEST	377	72	232	M/NM	3	1	80+	6500	1,40
Lepus W 1PLED G066 AUT	377	72	232	M/NM	1	1	80+	6500	1,35
Lepus W 3PLED G067 AUT	377	72	232	M/NM	3	1	80+	6500	1,40
Lepus W CEBLED G068	377	72	232	CEB	-	1	80+	6500	1,40
Lepus W 1PLED G079 2CLR AUT	377	72	232	M/NM	1	3	80+	6500	1,35
Lepus W 3PLED G080 2CLR AUT	377	72	232	M/NM	3	3	80+	6500	1,40
Lepus W CEBLED G081 2CLR	377	72	232	CEB	-	3	80+	6500	1,40

\*-M-maintained (with an option of connecting as non-maintained), NM- non-maintained, system power and output indicates data in emergency mode, tolerance range for optical and electrical data: ±10%, values apply to an ambient temperature of 25°C

## TECHNICAL DATA SHEET

---

**Available options:**

TEST	Manual test button	EMS	Fitting to emergency monitoring system
AUT	Autonomous testing system	LGREY	Light grey thermoplastic body
CEB	Fitting to central battery system	BLACK	Black thermoplastic body
CLV	Fitting to low voltage central battery system CEBLV		