



QUADRO LED


Aluminium Profile Luminaires

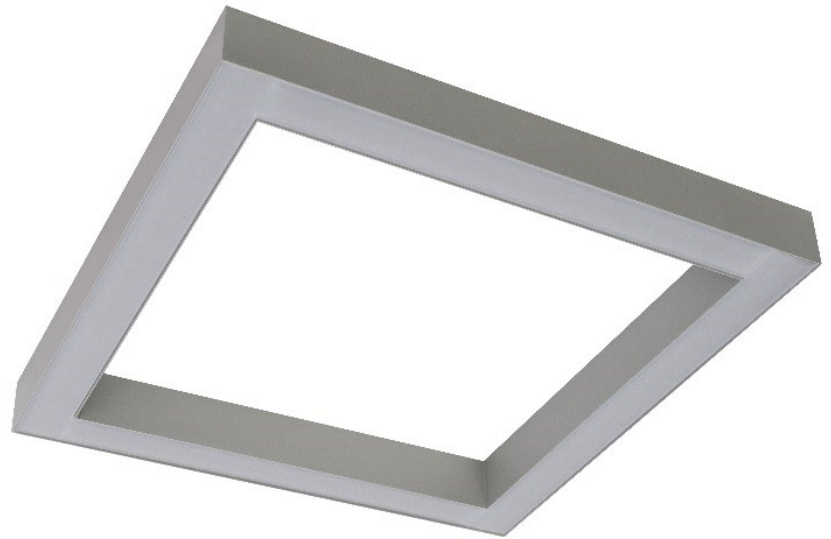

Description:	Suspended decorative LED luminaire Light distribution type: direct Optical system: opal polycarbonate diffuser/ matt micro-prismatic polycarbonate diffuser, low glare Housing: aluminium Colour: grey (RAL9006), white (RAL9003), black (9005)
General data:	Mains voltage: 220-240V, 0/50/60Hz LED lifetime, h: 750000/L80B50 SDCM: 3 Protection class IEC: I Ingress protection code: IP40 Mechanical impact resistance: IK05 Glow wire test, °C: 650 Operating temperature range, °C: ta 0...+35
Installation:	Suspended (wire, cable and cap to be ordered separately). Cable 2.0m, 3x0.75mm ² , transparent
Environment:	Indoor
Application:	Office, education, hotel, retail, public place

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI *	CCT*, K	Weight, kg
Quadro LED1x4550 D906 T840 OP LT80	900	900	68	4542	36,4	125	80+	4000	6,60
Quadro LED1x6200 D907 T840 OP LT80	900	900	68	6181	52,5	118	80+	4000	6,60
Quadro LED1x8400 D908 T840 OP LT80	900	900	68	8383	77,8	108	80+	4000	6,60
Quadro LED1x6100 D909 T840 OP LT80	1180	1180	68	6056	48,5	125	80+	4000	8,80
Quadro LED1x8250 D910 T840 OP LT80	1180	1180	68	8241	70,0	118	80+	4000	8,80
Quadro LED1x11200 D911 T840 OP LT80	1180	1180	68	11177	103,7	108	80+	4000	8,80
Quadro LED1x4550 D906 T840 DPRZ LT80	900	900	68	4542	36,4	125	80+	4000	6,60
Quadro LED1x6200 D907 T840 DPRZ LT80	900	900	68	6181	52,5	118	80+	4000	6,60
Quadro LED1x8400 D908 T840 DPRZ LT80	900	900	68	8383	77,8	108	80+	4000	6,60
Quadro LED1x6100 D909 T840 DPRZ LT80	1180	1180	68	6056	48,5	125	80+	4000	8,80
Quadro LED1x8250 D910 T840 DPRZ LT80	1180	1180	68	8241	70,0	118	80+	4000	8,80
Quadro LED1x11200 D911 T840 DPRZ LT80	1180	1180	68	11177	103,7	108	80+	4000	8,80

* Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

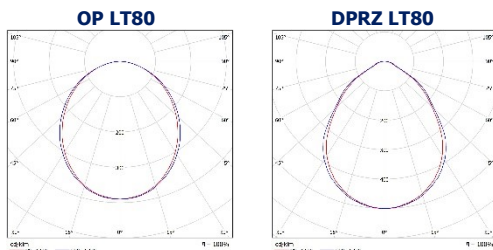

TECHNICAL DATA SHEET

Available options:

DALI	Driver with DALI interface <i>*note - DALI option in models D909, D D910, D911 uses 2 DALI addresses</i>
OP LT80	Opal diffuser with high light transmittance
DPRZ LT80	De-glaring micro-prismatic diffuser, matt

RAL
T830
T840

RAL colour
Colour temperature 3000K, CRI 80+
Colour temperature 4000K, CRI 80+

Available accessories:



Product: Suspension MTG KIT SUSI
Description: Suspension wire set "I" type, 1.5m adjustable, 1pcs
**note - 4pcs MTG SUSI KIT for 1 luminaire required*



Product: CAP1 CLEAR
Description: Plastic cap for hiding cable inlet into ceiling, clear



Product: CAP2 WHITE
Description: Plastic cap for hiding cable inlet into ceiling, white



Product: CAP4, white/ light grey/ black
Description: Square decorative metal cap for hiding cable inlet into ceilings



Product: CAP1 WHITE
Description: Plastic cap for hiding cable inlet into ceiling, white

Product: CAP2 CLEAR
Description: Plastic cap for hiding cable inlet into ceiling, clear

Product: CAP cable clip D6.3mm SET clear
Description: Cable and suspension wire clip set, 4pcs. For cable diameter up to 6.3mm and wire diameter 1mm