



Application: surrounding office buildings, parks, pedestrians

Ingress protection: IP 65

Material: anodised aluminium alloy

Colour: inox / grey

Number of LEDs: 4

Operating temperature range: from -40°C to +55°C

Expected useful lifetime: L90F10 – 50 000 h, L80F20 – 100000 h

CRI: >80 for 3500K, 2700K; >70 for 4000K, 5000K

Input voltage frequency: 50 - 60Hz

Inrush current: : 70A / 220µs




Code	Symbol	LED power	Luminaire power consumption	Temperatura barwowa światła	Luminaire luminous flux ¹⁾	Luminous efficacy	Unit volume	Concrete footing / reinforcement basket type	Net weight
215908/1	SIMPLE CUT LED 8	8W	14W	2700K	470lm	34lm/W	0,022m ³	B-0A / Z-0A	5,6kg
215908/3	SIMPLE CUT LED 8	8W	14W	3500K	530lm	38lm/W	0,022m ³	B-0A / Z-0A	5,6kg
215908/4	SIMPLE CUT LED 8	8W	14W	4000K	600lm	43lm/W	0,022m ³	B-0A / Z-0A	5,6kg
215908/6	SIMPLE CUT LED 8	8W	14W	5000K	600lm	43lm/W	0,022m ³	B-0A / Z-0A	5,6kg


1) tolerance +/- 7% due to LEDs accuracy

Directive: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE, 2009/125/EC

Product can be anodized in 10 colours, with gloss option

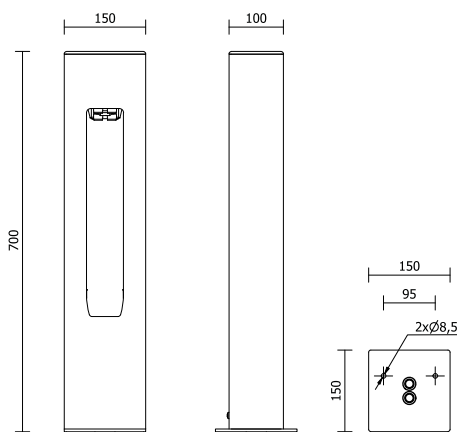

SIMPLE CUT LED

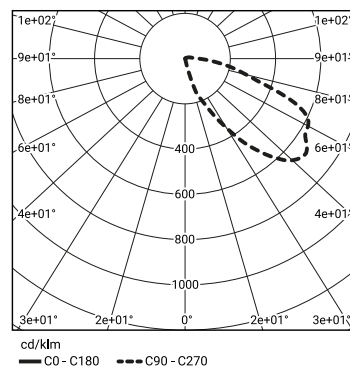

Acceptable quantity of luminaires SIMPLE CUT LED on one circuit, protected by:

Wyłączniki nadprądowe MCB typu B lub C

Kolumna	Typ	2A	4A	6A	10A	16A	20A	25A
SIMPLE CUT LED	B	1	2	3	5	8	10	12
	C	1	3	5	8	13	16	20

Bezpieczniki topikowe—typ gG i gL

Kolumna	2A	4A	6A	10A	16A	20A	25A
SIMPLE CUT LED	0	3	5	7	15	20	29