

TETRA PARCO Bollard

TETRA PARCO H. 1330 / LED White


CONVERTER /
CONTROL SYSTEMS
PAG. 586

220-240V 50/60Hz

IP65 protection rating
IK10 mechanical resistance

↓ LED colour temperature configurator

X = 9 → 2700K 3685 lm (¹)
X = 1 → 3000K 3685 lm (¹)
4000K on request

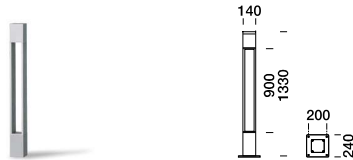


55°
diffuse


28W LED CRI >80
1620 lm 2700K (²)
1620 lm 3000K (²)

ON-OFF → 50 35 6X1

DALI → 50 35 6X1DALI



781 cd/klm
@3000K



@3000K
h:1,3 m

438 lux
289 lux
189 lux
113 lux
5 lux



← light simulation

Interdistance of fixtures: 10 m

code: 50 35 611


TETRA PARCO H. 1930 / LED White

220-240V 50/60Hz

IP65 protection rating
IK10 mechanical resistance

↓ LED colour temperature configurator

X = 9 → 2700K 3685 lm (¹)
X = 1 → 3000K 3685 lm (¹)
4000K on request

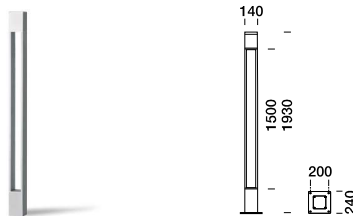


55°
diffuse


28W LED CRI >80
1620 lm 2700K (²)
1620 lm 3000K (²)

ON-OFF → 50 35 6X2

DALI → 50 35 6X2DALI



781 cd/klm
@3000K



@3000K
h:1,9 m

203 lux
134 lux
88 lux
52 lux
5 lux




← light simulation

Interdistance of fixtures: 10 m

code: 50 35 612

accessories



Tie-rod

89 50 090


(¹) led data - (²) real data . Due the continuing technological developments the present data may vary from what is stated in the current catalogue. The Technical data available from the platek.eu website are continuously updated in the data sheets.

TETRA PARCO

Urban and residential post

TETRA PARCO H. 2270 / LED White

CONVERTER /
CONTROL SYSTEMS
PAG. 586

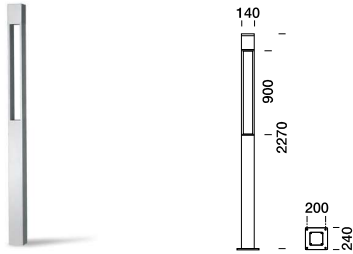

220-240V 50/60Hz

↓ LED colour temperature configurator


IP65 protection rating
IK10 mechanical resistance

X = 9 → 2700K 4900 lm (!)
X = 1 → 3000K 4900 lm (!)
4000K on request




55°
diffuse


41W LED CRI >80
2390 lm 2700K (!)
2390 lm 3000K (!)



773 cd/klm
@3000K



@3000K
h:2,2 m
221 lux
146 lux
95 lux
57 lux
5 lux

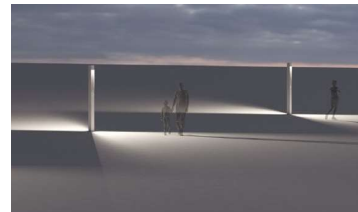

← light simulation


Interdistance of fixtures: 12 m

code: 50 35 613

ON-OFF → 50 35 6X3

DALI → 50 35 6X3DALI

TETRA PARCO H. 2600 / LED White

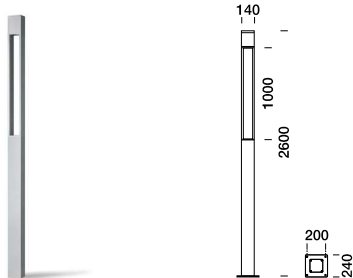

220-240V 50/60Hz

↓ LED colour temperature configurator


IP65 protection rating
IK10 mechanical resistance

X = 9 → 2700K 4900 lm (!)
X = 1 → 3000K 4900 lm (!)
4000K on request




55°
diffuse


41W LED CRI >80
2390 lm 2700K (!)
2390 lm 3000K (!)



773 cd/klm
@3000K



@3000K
h:2,6 m
157 lux
104 lux
68 lux
41 lux
5 lux

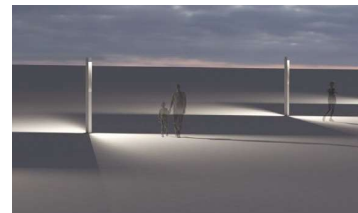

← light simulation

Interdistance of fixtures: 12 m

code: 50 35 614

ON-OFF → 50 35 6X4

DALI → 50 35 6X4DALI