


# TRIS Bollard

TRIS H. 900 / LED White

CONVERTER /  
CONTROL SYSTEMS  
PAG. 586

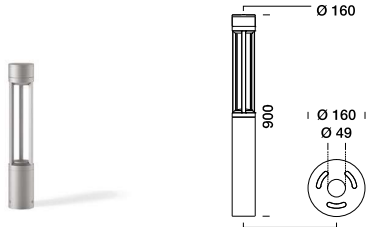

220-240V 50/60Hz

IP66 protection rating  
IK10 mechanical resistance

↓ LED colour temperature configurator

X = 9 → 2700K 2600 lm (!)  
X = 1 → 3000K 2600 lm (!)  
4000K on request




76°  
diffuse


21W COB LED CRI >80  
2070 lm 2700K (°)  
2070 lm 3000K (°)

ON-OFF → 33 33 6X1

DALI → 33 33 6X1DALI




356 cd/klm  
@3000K



@3000K  
h: 0,9 m

490 lux  
324 lux  
211 lux  
126 lux  
5 lux

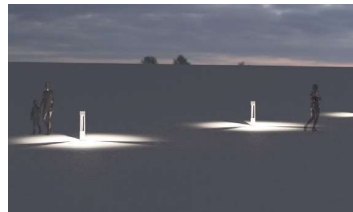


← light simulation

Interdistance of fixtures: 4 m

code: 33 33 611

TRIS H. 1800 / LED White

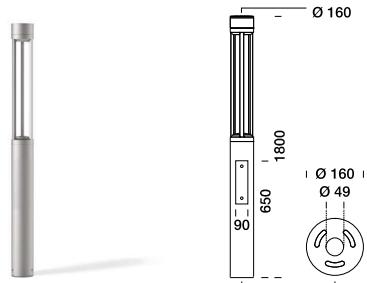

220-240V 50/60Hz

IP66 protection rating  
IK10 mechanical resistance

product with inspection door

↓ LED colour temperature configurator

X = 9 → 2700K 3685 lm (!)  
X = 1 → 3000K 3685 lm (!)  
4000K on request




76°  
diffuse


26W COB LED CRI >80  
2880 lm 2700K (°)  
2880 lm 3000K (°)

ON-OFF → 33 33 6X2

DALI → 33 33 6X2DALI



356 cd/klm  
@3000K



@3000K  
h: 1,8 m

171 lux  
113 lux  
74 lux  
44 lux  
5 lux




← light simulation

Interdistance of fixtures: 10 m


code: 33 33 612

## accessories

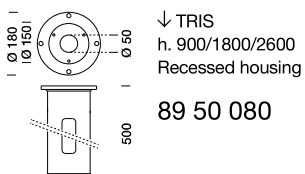

↓ TRIS  
h. 900/1800/2600  
Recessed housing

89 50 080

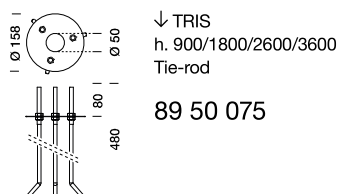

↓ TRIS  
h. 900/1800/2600/3600  
Tie-rod

89 50 075



Shield for two openings  
(colour .01 black)

89 01 045


(!) led data - (°) real data . Due the continuing technological developments the present data may vary from what is stated in the current catalogue. The Technical data available from the platek.eu website are continuously updated in the data sheets.

# TRIS

## Urban and residential post

TRIS H. 2600 / LED White

CONVERTER /  
CONTROL SYSTEMS  
PAG. 586

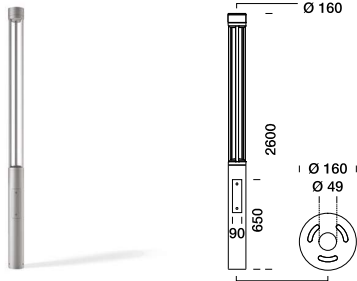


220-240V 50/60Hz

IP66 protection rating  
IK10 mechanical resistance

product with inspection door

↓ LED colour temperature configurator

**X = 9** → 2700K 4900 lm (!)  
**X = 1** → 3000K 4900 lm (!)  
4000K on request




76°  
diffuse


39W COB LED CRI >80  
3820 lm 2700K (!)  
3820 lm 3000K (!)

ON-OFF → 33 33 6**X**4


DALI → 33 33 6**X**4DALI



446 cd/klm  
@3000K



@3000K  
h:2,0 m  
245 lux  
162 lux  
105 lux  
63 lux  
5 lux

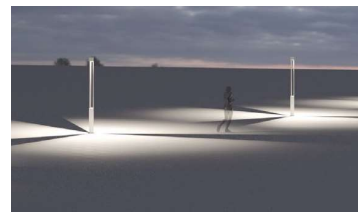


← light simulation

Interdistance of fixtures: 12 m

code: 33 33 614

TRIS H. 3600 / LED White

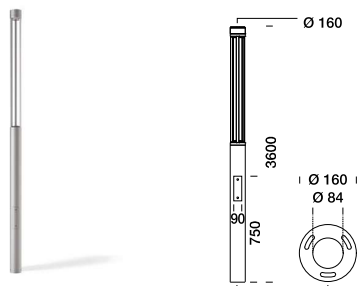


220-240V 50/60Hz

IP66 protection rating  
IK10 mechanical resistance

product with inspection door

↓ LED colour temperature configurator

**X = 9** → 2700K 4900 lm (!)  
**X = 1** → 3000K 4900 lm (!)  
4000K on request




76°  
diffuse

39W COB LED CRI >80  
3820 lm 2700K (!)  
3820 lm 3000K (!)

ON-OFF → 33 33 6**X**3


DALI → 33 33 6**X**3DALI



446 cd/klm  
@3000K



@3000K  
h:3,6 m  
75 lux  
50 lux  
33 lux  
19 lux  
5 lux

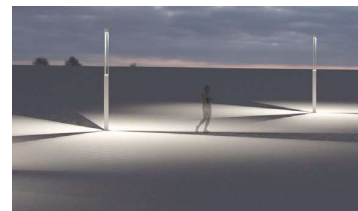

← light simulation

Interdistance of fixtures: 14 m

code: 33 33 613