



Acciaio LED

ACCIAIO REG 2X58W M1200 4K




Order code **A258RD**

EAN 8002219883582

Technical specifications

Absorbed Power	51 W, 43 W, 35 W, 28 W
Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Ambient temperature (min)	-20 °C
Ambient temperature (max)	40 °C
Insulation class	I
CCT light tone	4000 K
Photobiological risk	RG0
Colour consistency	SDCM3
CRI color rendering	>80
Driver type	RD
Ballast	For constant current LED
Efficiency	157 lm/W, 163 lm/W, 171 lm/W, 175 lm/W
Energy class	C
Equivalent power	2x58w
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Glow wire strength	850 °C - 30s.
Inrush current	45 A
Luminaire flux	8000 lm, 7000 lm, 6000 lm, 4900 lm
Luminous flux L80B20	90000 h
Mounting	Ceiling
Breaker B10 (Qty max)	15
Breaker B16 (Qty max)	24
Breaker C10 (Qty max)	15
Breaker C16 (Qty max)	24
THD	20
Voltage supply range (max)	265 V
Voltage supply range (min)	93 V

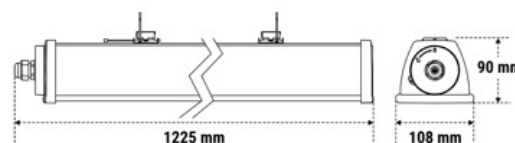


Installation and applications

Environment	Secondary Areas
Application	Production, Warehouses , Industrial Areas

Mechanical specifications

Height	90 mm
Length	1225 mm
Width	108 mm
Body material	Sheet steel epoxy coated

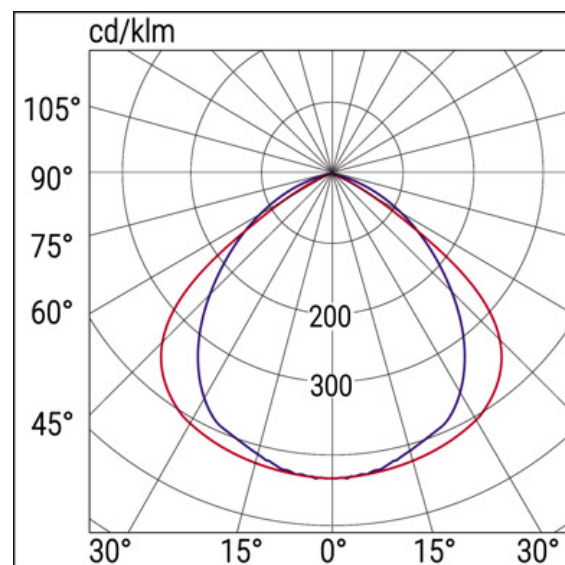


Colour housing	Grey RAL 7035
Cover material	Tempered microprismatic glass
Reflector material	Specular Aluminium
Protection grade IP	IP66
Protection grade IK	IK09

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-1:1989, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019

Accessories




20122
STAFFA ORIENTABILE ACC E LED



15019
RACCORDO DOPPIO INGRESSO M20



20107
SCHERMO ACC PROTEZ HCCP 1200



8063/1
GR STAFFA UNICA GRIGLIA 8063



15018
KIT ATEX ACCIAIO ECO



8063
BS100 GRIGLIA PROTEZ 36/58W

Inverter accessories



19371
INV P&L LED SE/SA 3H 60-180V




19399
INV UNIV CT 5W 20-240V



19398
INV UNIV AT RM 5W 20-240V



15037
MODULO LGFM




15079
MODULO LG SLIM



19367
INV P&L LED SE/SA 1H 60-180V



RA13
BOOSTER BAT LiFe 6.4V 1.5Ah



15080
MODULO DALI SLIM