
## Post SOK R-Z 2,4 + Clock $\emptyset$ 700 with decor

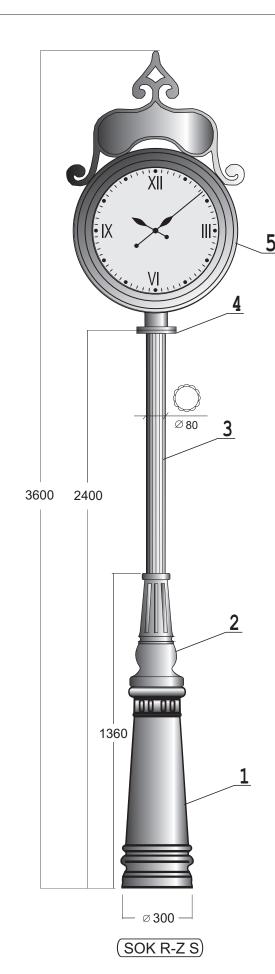

## Specification:

- power 230V/24H or 230V by night (from street light)
- power supply by night requires charging circuit with battery
- automatic time control (DCF/GPS)- maintenance-free mechanism
- white LED backlight switched automatically or with street light
- clock face and clock hands to choose or by project
- powder painting with anticorrosion undercoat
- colour RAL 9005 or other by RAL

5	Clock housing		Al.			
4	Fixing plate		Al.			
3	Fluted pipe Ø80		Al.			
2	Element R		Al.			
1	Base S20		Al			
No.	name	weight[kg]	mat.	q'ty		

PRO MAR

Post SOK R-Z 2,4m + Clock Ø700 with decor

Drawing no. 1/SOK R-Z S 2,4/3,6

PROMAR A.Zarański Sp.j. | UI. Gruntowa 114 | 44-210 Rybnik [PL] | e-mail: biuro@promar-sj.com.pl