

Traditional poles type SP



Pole **SP-3W/A**
Extension arm
WT-5/2
Luminaires
ELBA LED



Pole **SP-4W/E**
Extension arm
WTM-11/2
luminaires OP
lamp diffusers Sphere
transparent Ø400
stainless steel louvre
reflectors




Pole **SP-5W/E**
Extension arm
WTM-20/2
luminaires OW LED
transparent lamp
diffuser



Example of the pole construction SP-4W

Pole type		SP-2	SP-3	SP-3W	SP-31W	SP-4W	SP-5W
Height of the pole H [mm]		2818	3735	3735	4000	4645	6000
Code	Spigot type A	17210	17310	17311	173111	17411	-
	Spigot type B	17220	-	17321	173211	17421	-
	Spigot type E	-	-	17351	173511	17451	17551
Net weight [kg]	Spigot type A	19	34	37	41	44	-
	Spigot type B	17	-	31	35	37	-
	Spigot type E	-	-	40	42	50	73
Approximate unit volume [m³]*	Spigot type A	0,06	0,13	0,13	0,19	0,16	-
	Spigot type B	0,06	-	0,13	0,19	0,16	-
	Spigot type E	-	-	0,14	0,2	0,17	0,35
Proposed types of luminaires mounted directly on the pole / pole top mounted		Spigot type "B": ELBA LED, OS-1 LED, OS-11 LED, ATLANTIS LED, ELBA, OS-1, OP, OPA-1					
Proposed extension arms and bracket configurations type		Spigot type "A": bracket configuration type "P", extension arms WT, WA-1, WA-01, WA-4 Spigot type "E": extension arms WTM					
Concrete footing / reinforcement basket type		B-20 / Z-20	B-40B / Z-40B	B-40B / Z-40B	B-60T / Z-60T	B-40 / Z-40	B-71T / Z-71T
Threaded anchor ending		3 x M12	3 x M14	3 x M14	4 x M18	3 x M14	4 x M18
Concrete footing / reinforcement basket code		311120 / 311202	311140B / 311204B	311160T / 311206T	311160T / 311206T	311140 / 311204	311171T / 311271T
Fasteners		311002	311003	311003	4008	311003	4008
Dimension of the base plate		ø 225	ø 300	ø 300	320 x 250	ø 300	400 x 300

* For order of more than 10 pcs stated volume may change according to packing.
W – pole with wiring chamber

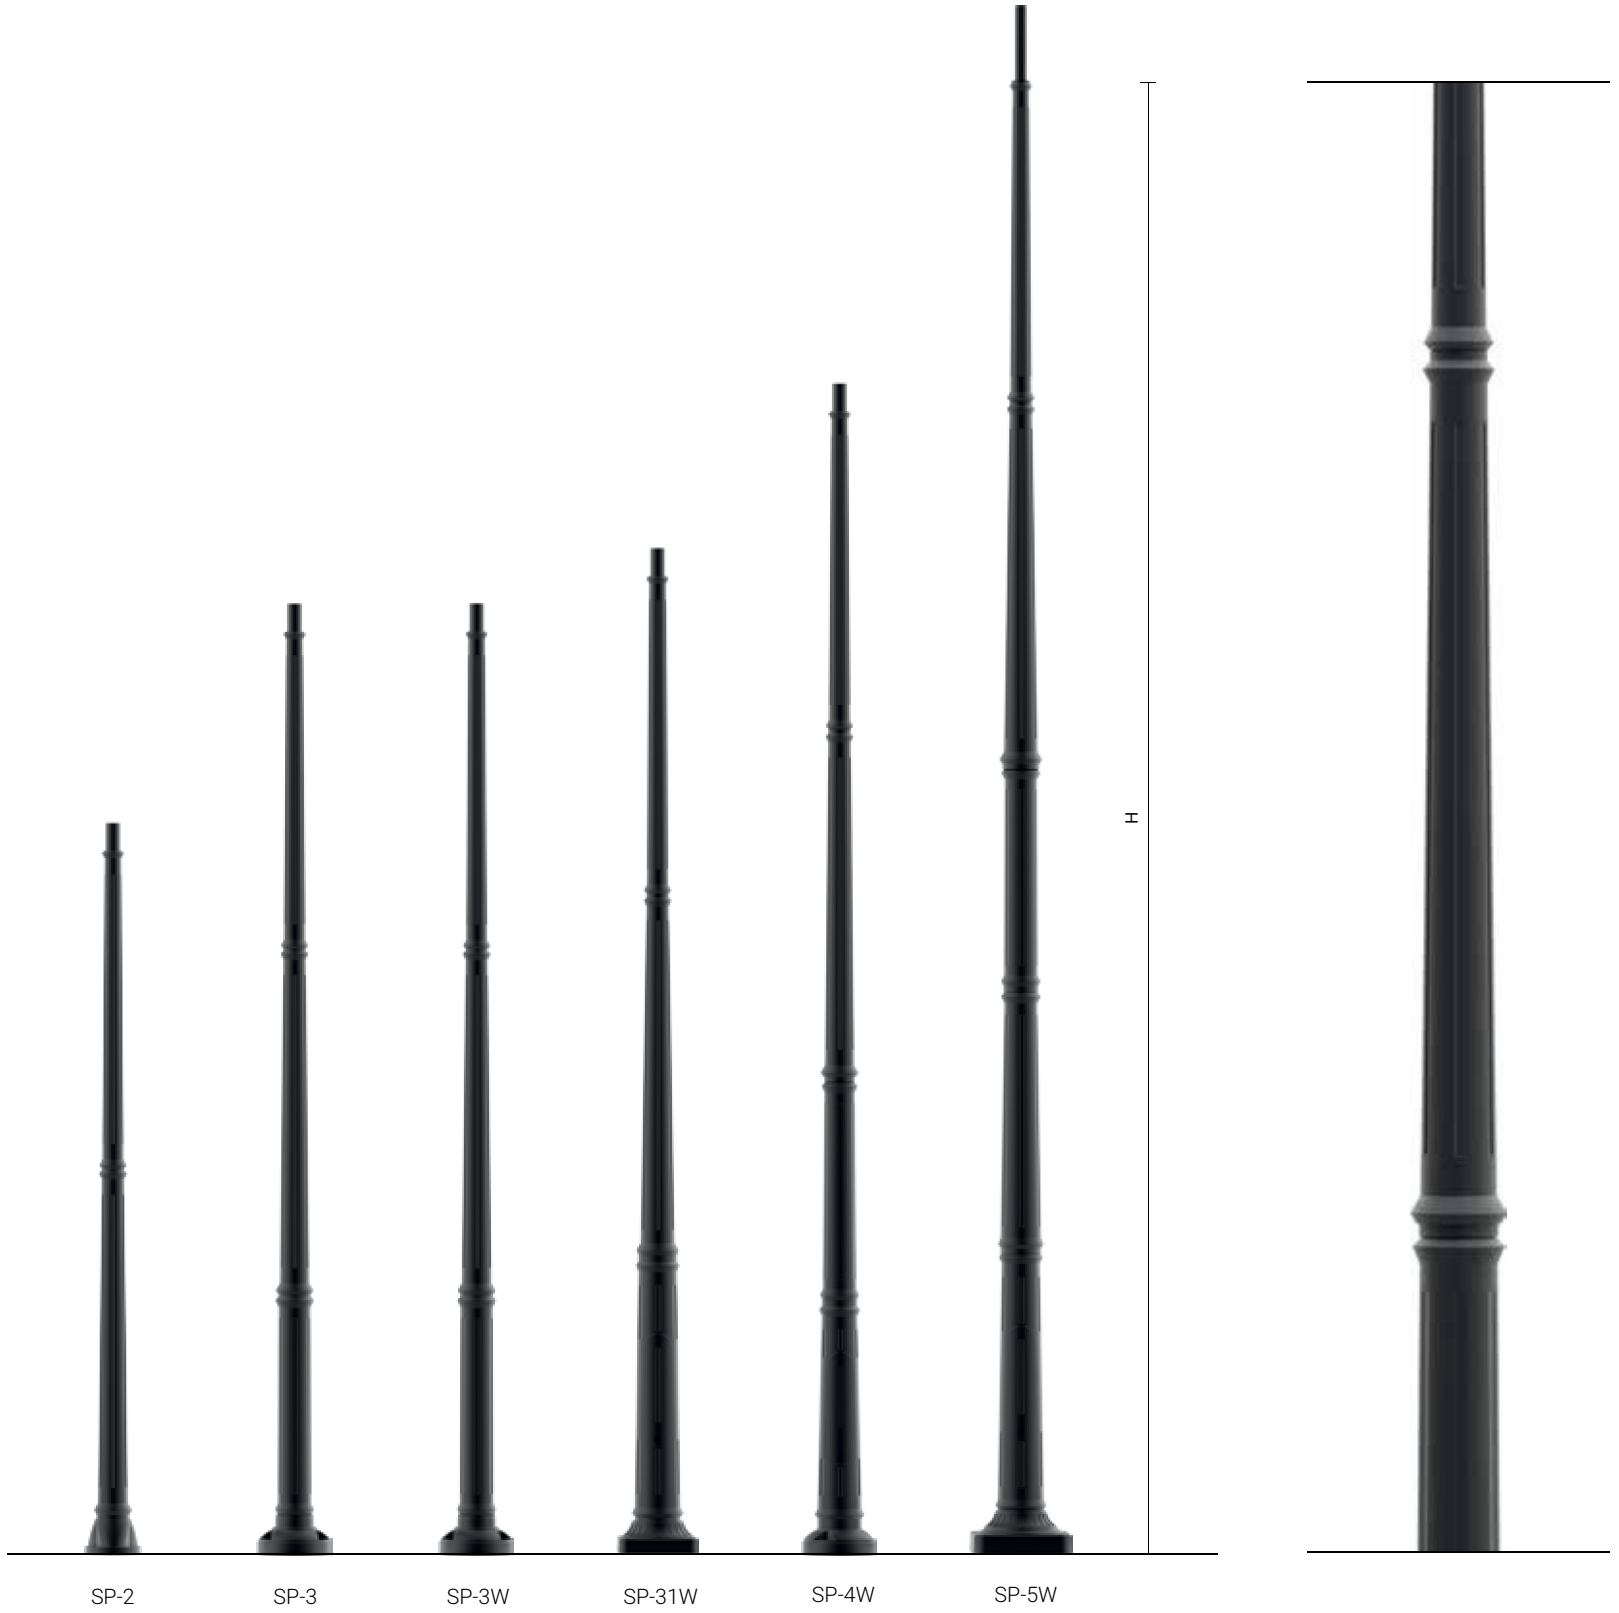

SP-2

SP-3

SP-3W

SP-31W

SP-4W

SP-5W